

DALI Rotary Panel Series

——DAR-G1



DAR-G1

1. Technical Parameters

Power Supply: Provided by DALI Bus

Output Signal : DALI Signal

Static power: <0.5W

Current Consumption: 25mA±10%

Output channel: 1CH

Product dimension: L86*W86*H51MM(L.W.H)


Packing size: L116*W110*H56.5MM(L.W.H)

Working temperature: -20°C-60°C


Net weight: 190g

Gross weight: 248g


2. Product Size

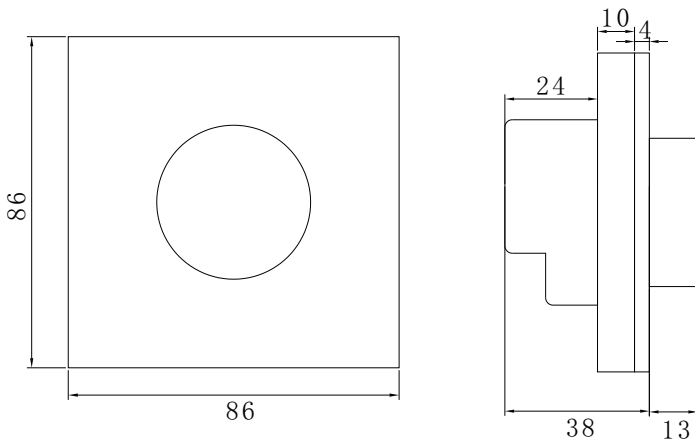


3. Function Description

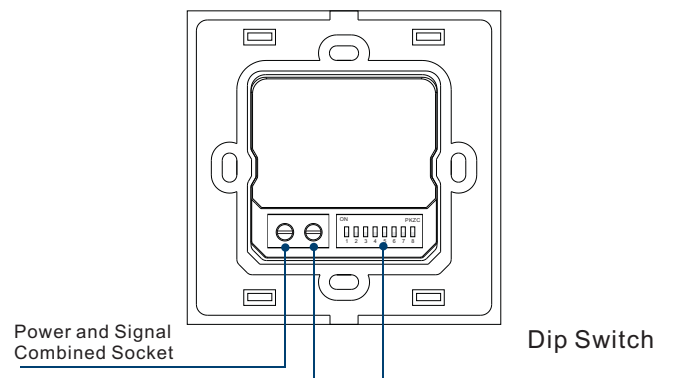

4. Typical Application:

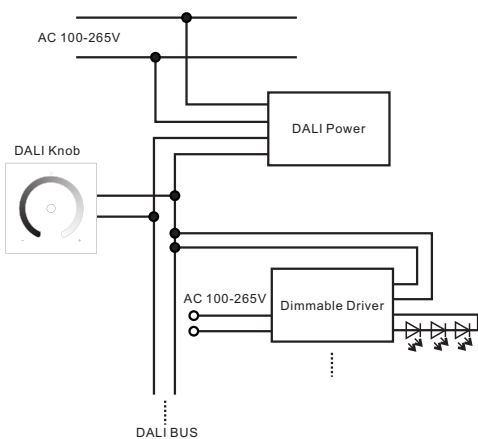




5. Interface Introduction

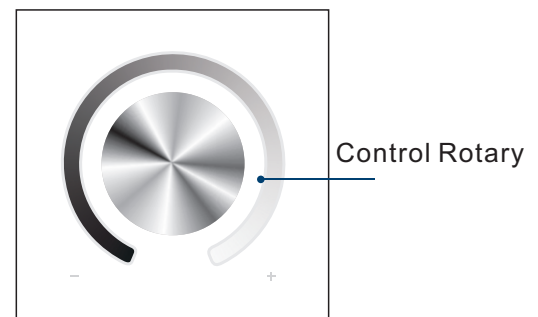


- Short press control rotary to turn on/off the controller.
- Long press control rotary to adjust brightness.
- Spin control rotary to adjust brightness.

6.DIP Switch Operation


- Via dip switch,you can set 64 single addresses(0-63)
16 group addresses(0-15),and broadcast address.
- Total address value=the sum of the dip switch value
To get the place value when in “on” position,otherwise
will be 0.




E.g.1:Set initial address to 20 in Single Address Mode.




E.g.2:Set initial address to 12 in Group Address Mode.



7.Installation Instruction:

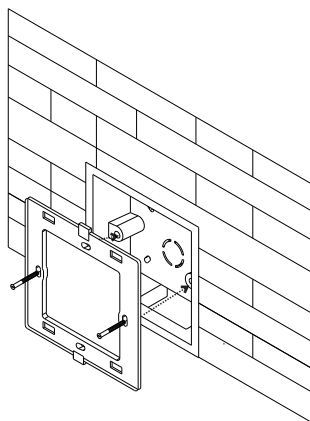

- To lock the bottom case on the wall and fix it with the screwdriver.

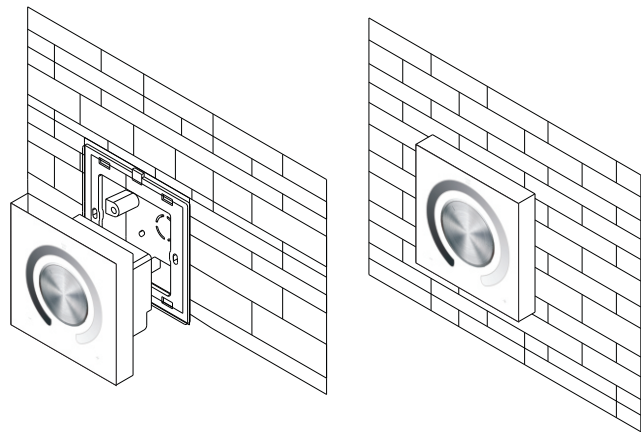

- To buckle the 0/1-10V controlle to the bottom case.