



SURFACE MOUNTED

PRODUCT DESCRIPTION

- Ultra-thin design, High luminous angle
- Ra90, true color display
- 3000K/4000K/6000K
- one power supply connection 6 cabinet lights
- non-flicker lighting, no super blue-ray, heathy for eyes
- Small size, wide usage




TECHNICAL PARAMETERS

Model:	LT-CB08-06
Input:	DC12V
Power:	6W
CCT:	3000K/4000K/6000K
Ra:	90
Length:	60cm (custom)
Finish:	silver anodized






INSTALLATION DIAGRAM

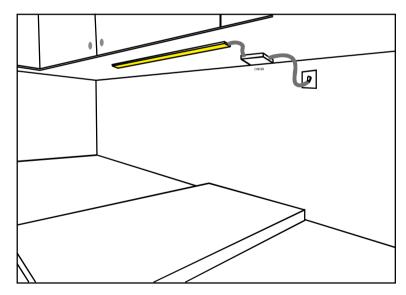

INSTALLATION INSTRUCTION

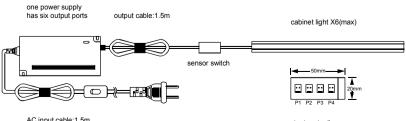

AC input cable:1.5m, switch is in the middle

output ports diagram