

Tel:
Fax:

Page 1 of 34 Pages

Report No.:

Test Time: 2020-07-01 11:07

Luminaire Property

Luminaire Manufacturer:

Luminaire Category: LED Strip Light

Luminaire Description: LT-2835WW120R-W24-IP33

Lamp Catalog: SMD

Number of Lamps: 1

Luminous Length (mm): 1000

Voltage: 24.0 V

Power: 14.20 W

Lamp Description: SMD

Lumens per Lamp: 1359.8

Luminous Width (mm): 11

Current: 0.592 A

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 1359.8 lm

Downward Ratio: 99.12%

Horizontal Diffuse Angle(25%,50%): H145.1,H117.2

Vertical Diffuse Angle(25%,50%): V145.6,V117.1

Luminaire Efficacy Rating (LER): 95.81

Max. Intensity: 449.52 cd

S/MH(C0/C180): 1.29

Total Rated Lamp Lumens: 1359.8 lm

Efficiency: 100.00%


Upward Ratio: 0.87%

Central Intensity: 449.51 cd


Pos of Max. Intensity: H0 V0

S/MH(C90/C270): 1.29

Picture Of Luminaire



Luminous Intensity Distribution Curve

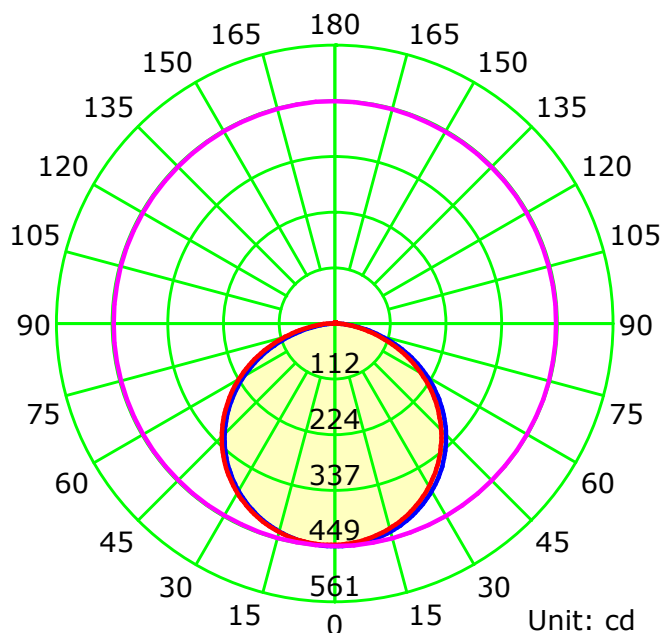

Average Diffuse Angle(50%): 117.2°

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-360.0: 22.5

Test Lab: Shining

Test Type: TYPE C

Temperature:

Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 8.528 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

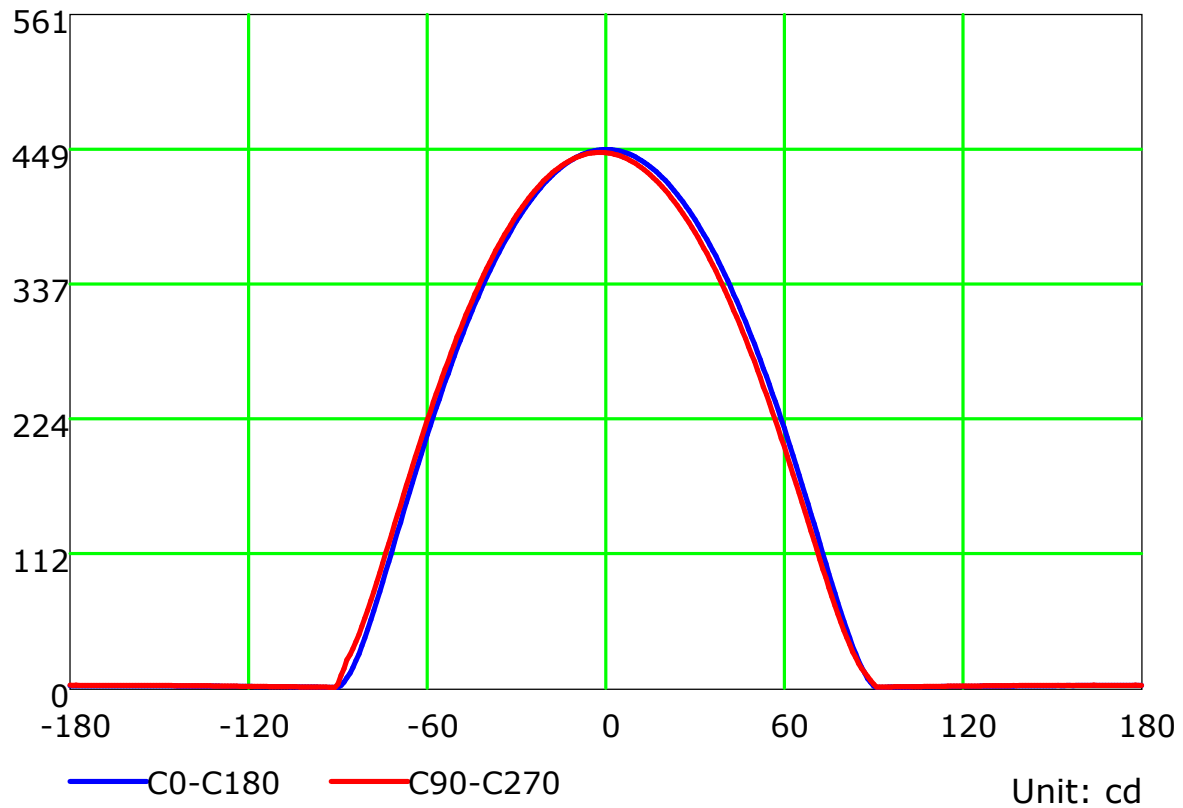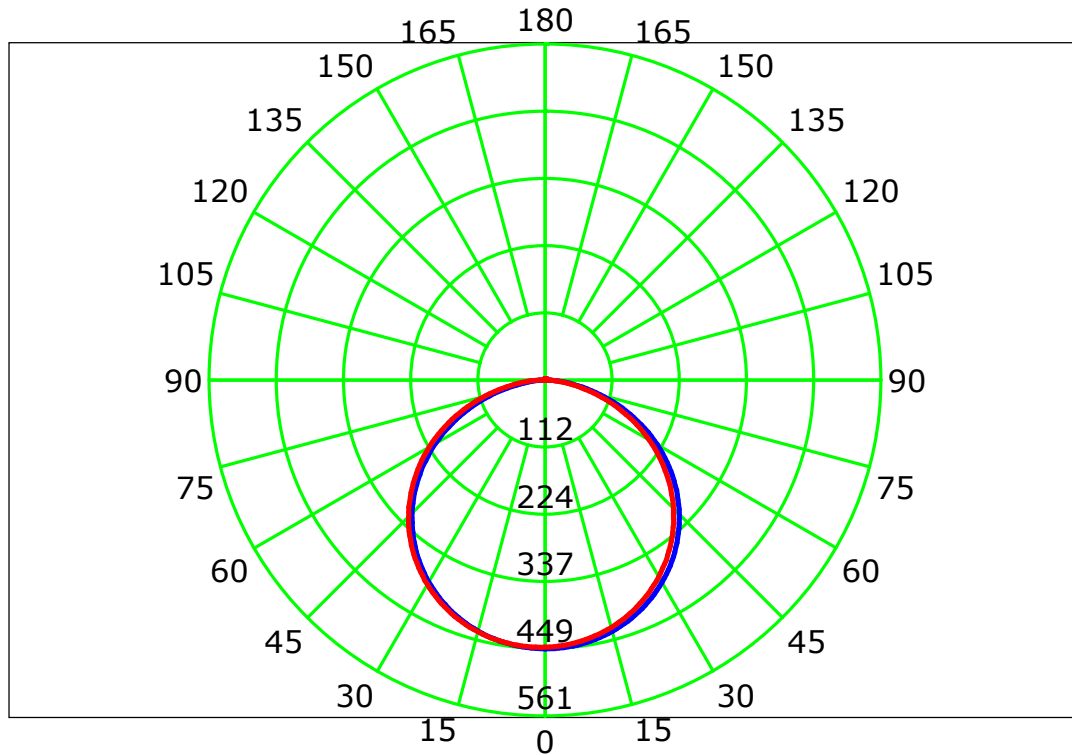

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

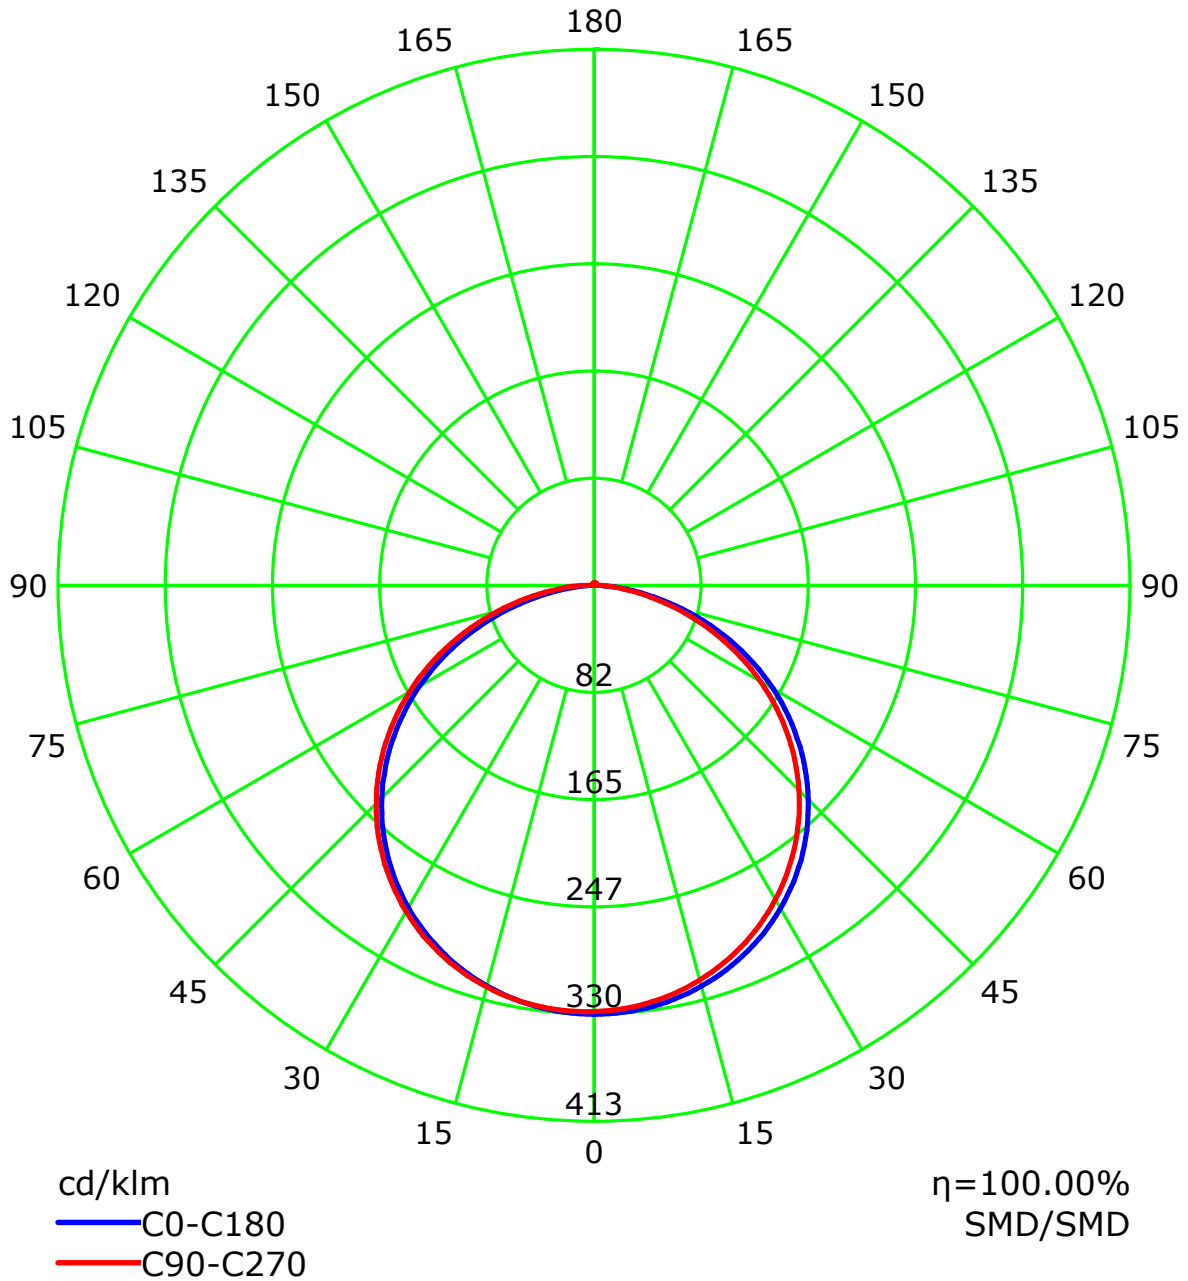

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	97	93	90	92	90	87	89	87	85	82
2	98	90	83	77	95	88	81	76	84	79	74	81	76	72	77	74	70	68
3	89	79	70	64	87	77	69	63	74	67	62	71	65	61	68	63	59	57
4	82	69	60	54	79	68	60	53	65	58	52	63	57	52	61	55	51	49
5	75	62	53	46	73	61	52	46	58	51	45	56	50	45	54	49	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	36
7	64	50	41	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	30	29
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	26
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23


Spacing Criteria (0-180): 1.29
Spacing Criteria (90-270): 1.29
Spacing Criteria (Diagonal): 1.41

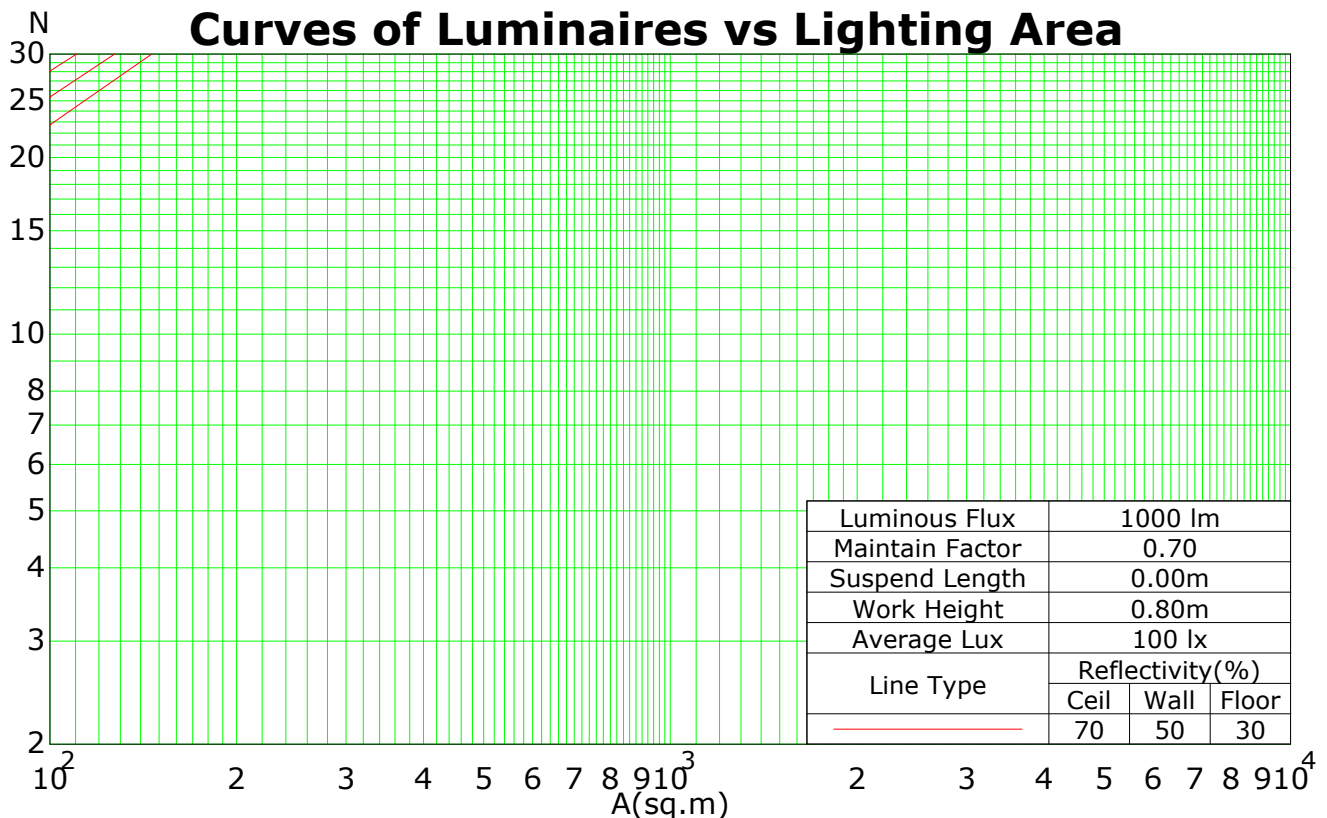

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Isocandela (rectangle)

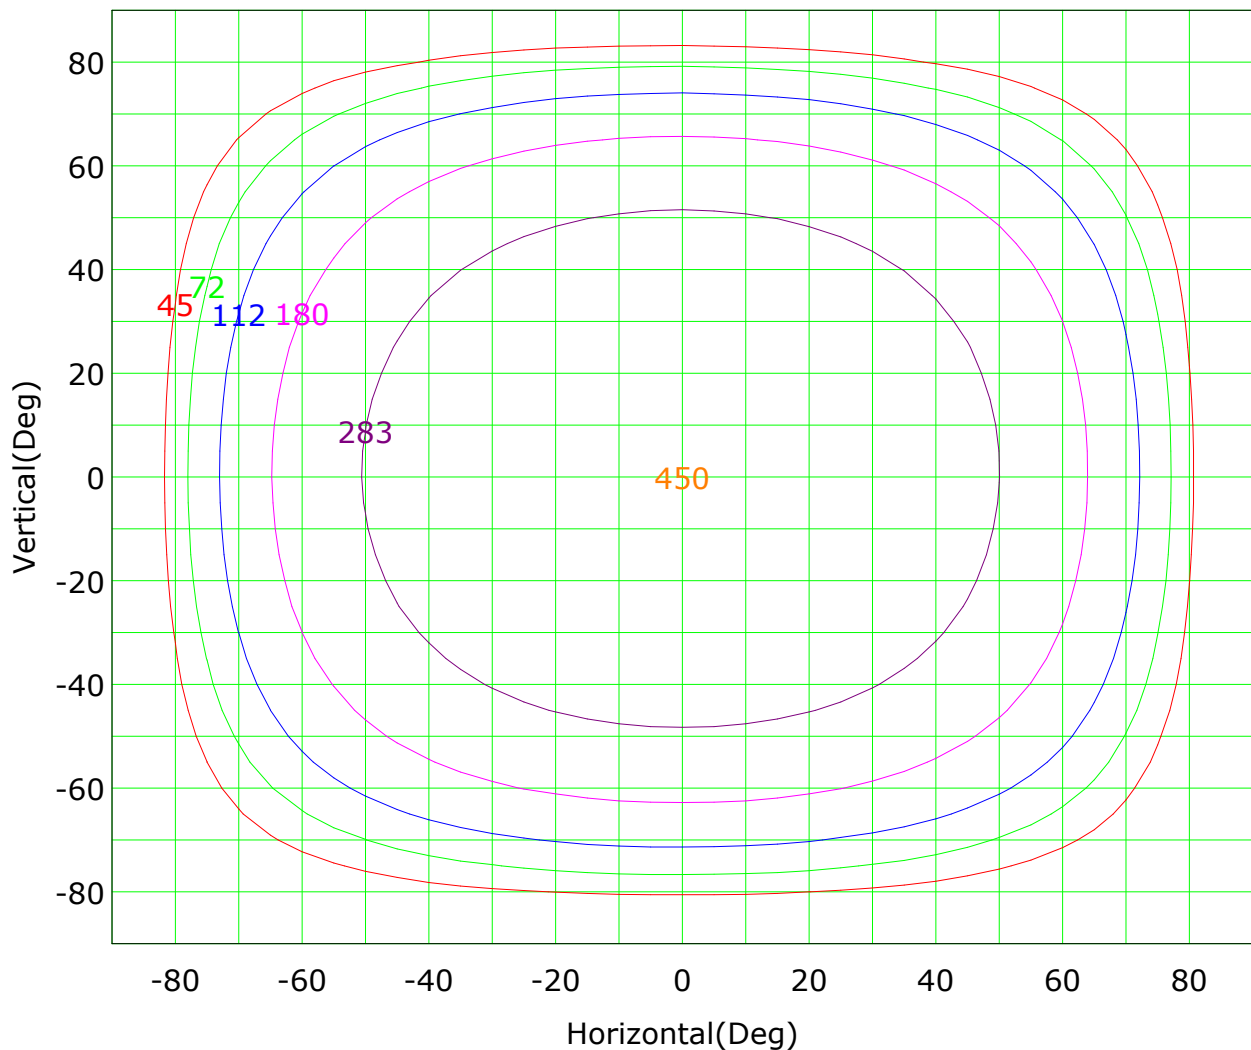

Imax (100%): 450 cd

(10%):	45 cd	(16%):	72 cd
(25%):	112 cd	(40%):	180 cd
(63%):	283 cd	(100%):	450 cd

C Plane (°):0.0-360.0: 22.5

Test Lab: Shining

Test Type: TYPE C

Temperature:

Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.528 m

Humidity:

Inspector:

Isocandela (sphere)

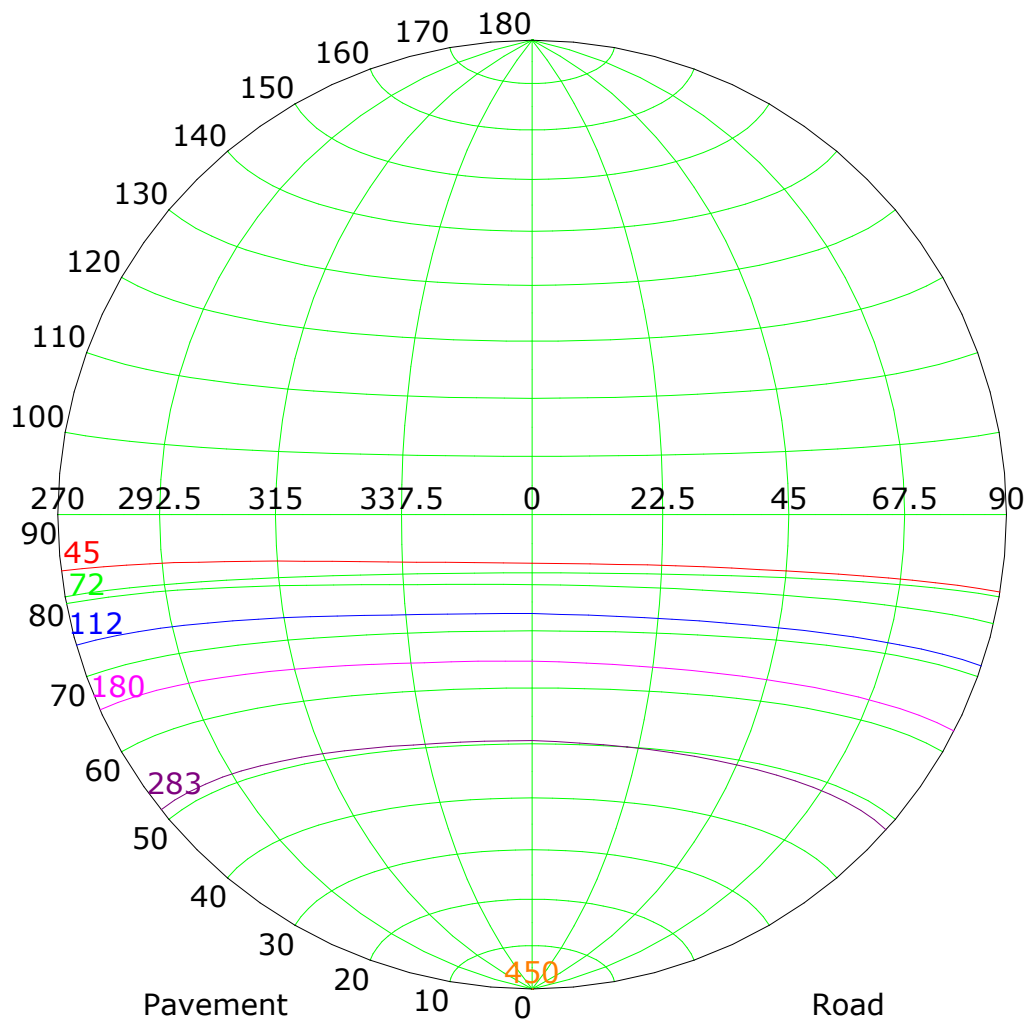

Imax (100%): 450 cd

(10%):	45 cd	(16%):	72 cd
(25%):	112 cd	(40%):	180 cd
(63%):	283 cd	(100%):	450 cd

C Plane (°):0.0-360.0: 22.5

Test Lab: Shining

Test Type: TYPE C

Temperature:

Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.528 m

Humidity:


Inspector:

IsoLux Plot

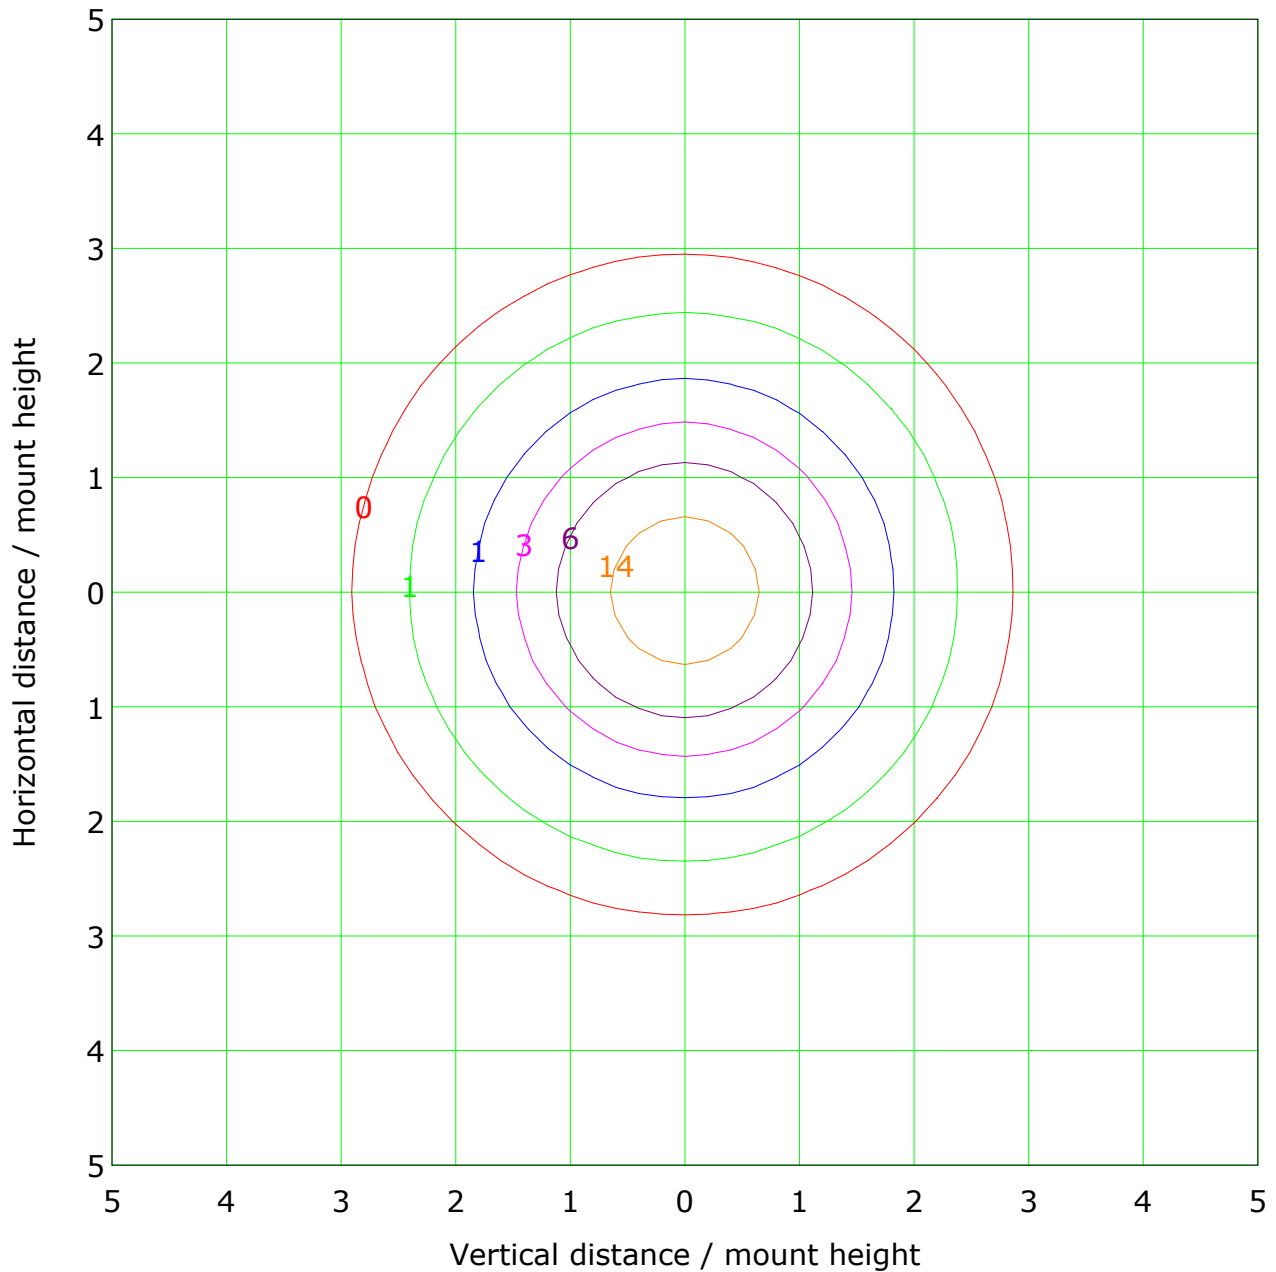

Roadway CU Curve

Efficiency(%)

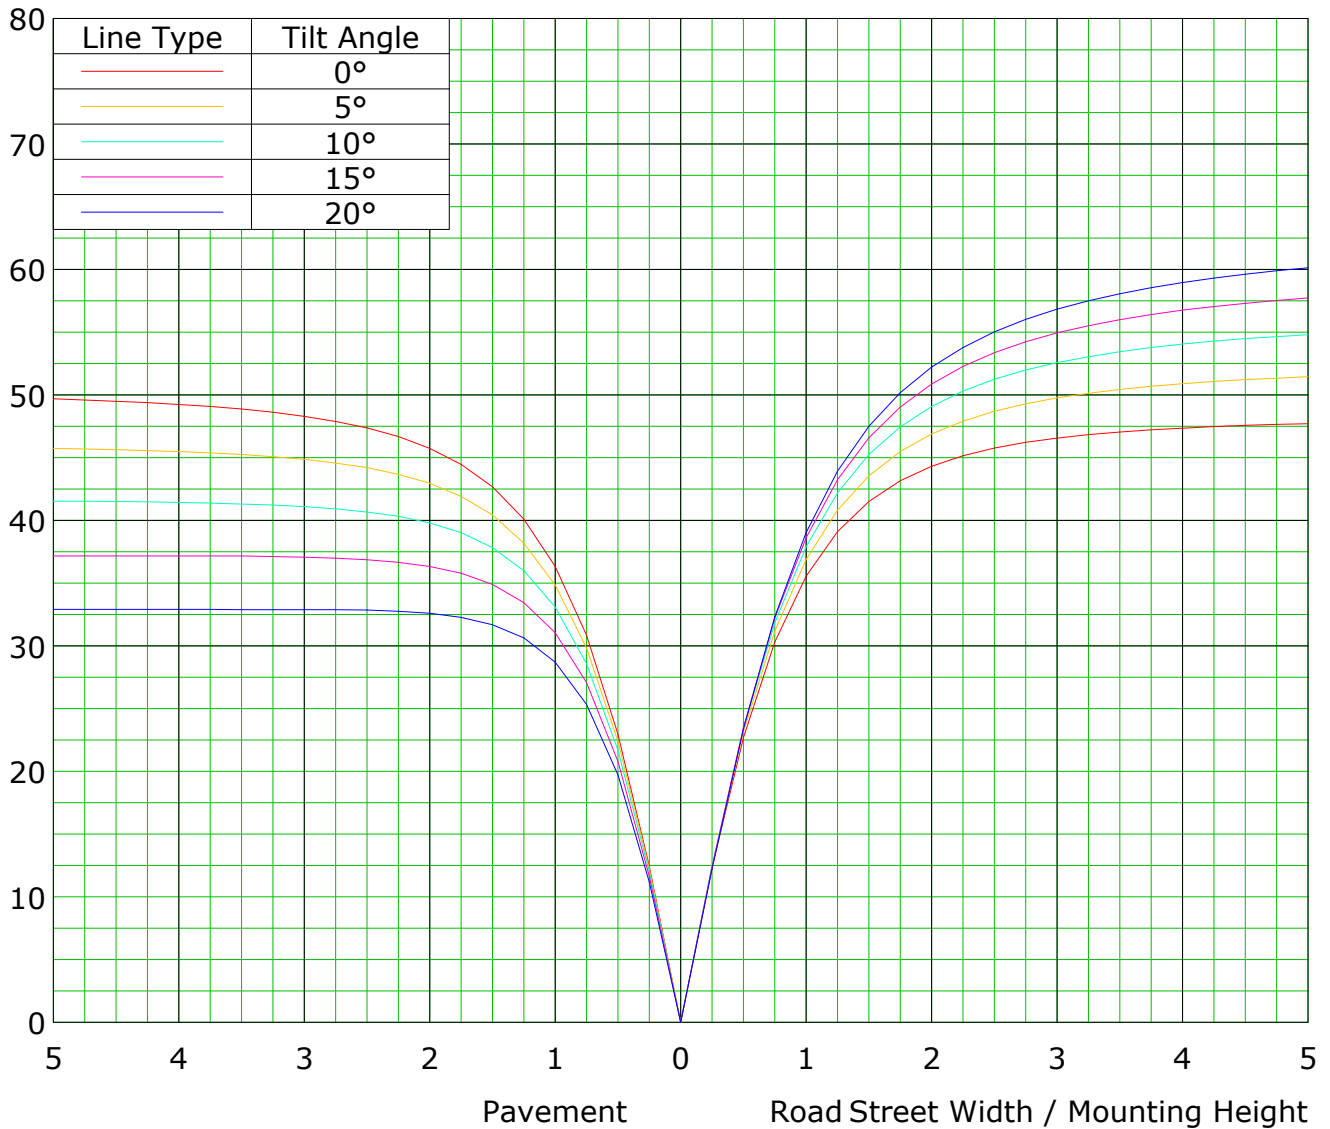

C Plane (°):0.0-360.0: 22.5

Test Lab: Shining

Test Type: TYPE C

Temperature:

Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.528 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

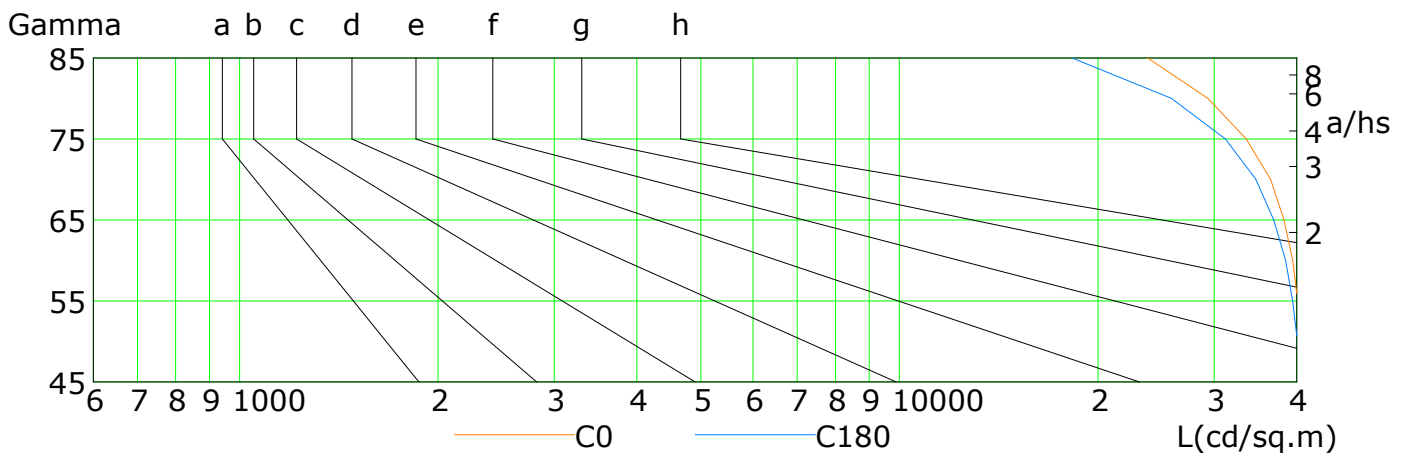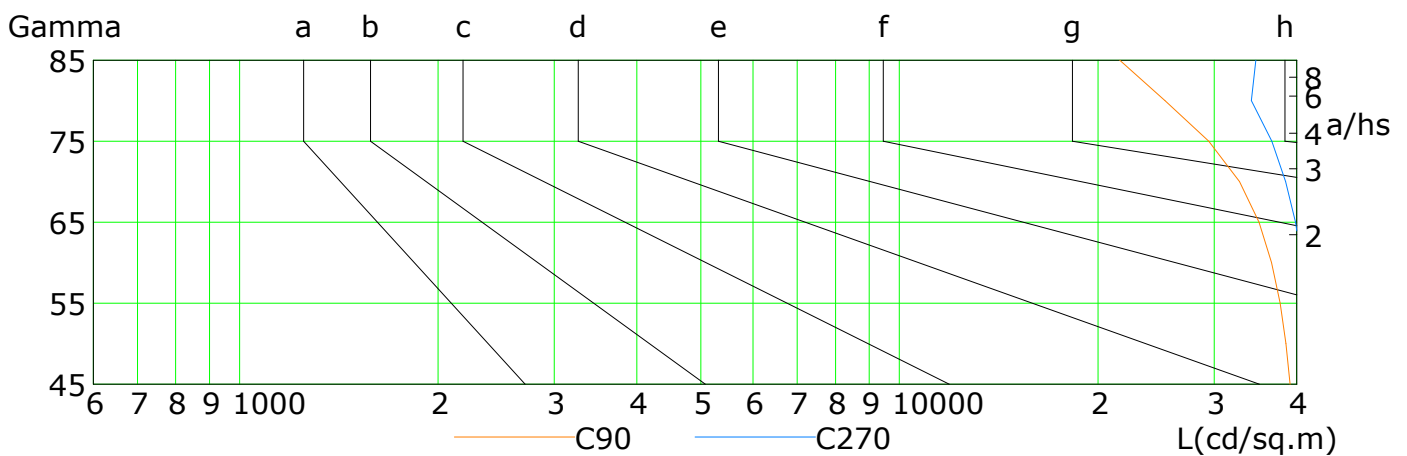


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	40860	40620	40160	39458	38255	36529	33562	29344	23782
C90	39089	38548	37760	36653	35082	32771	29441	25271	21571
C180	40477	40108	39461	38475	36945	34706	31191	25831	18274
C270	41517	41471	41193	40693	39858	38504	36674	34170	34671


C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Illuminance at a Distance

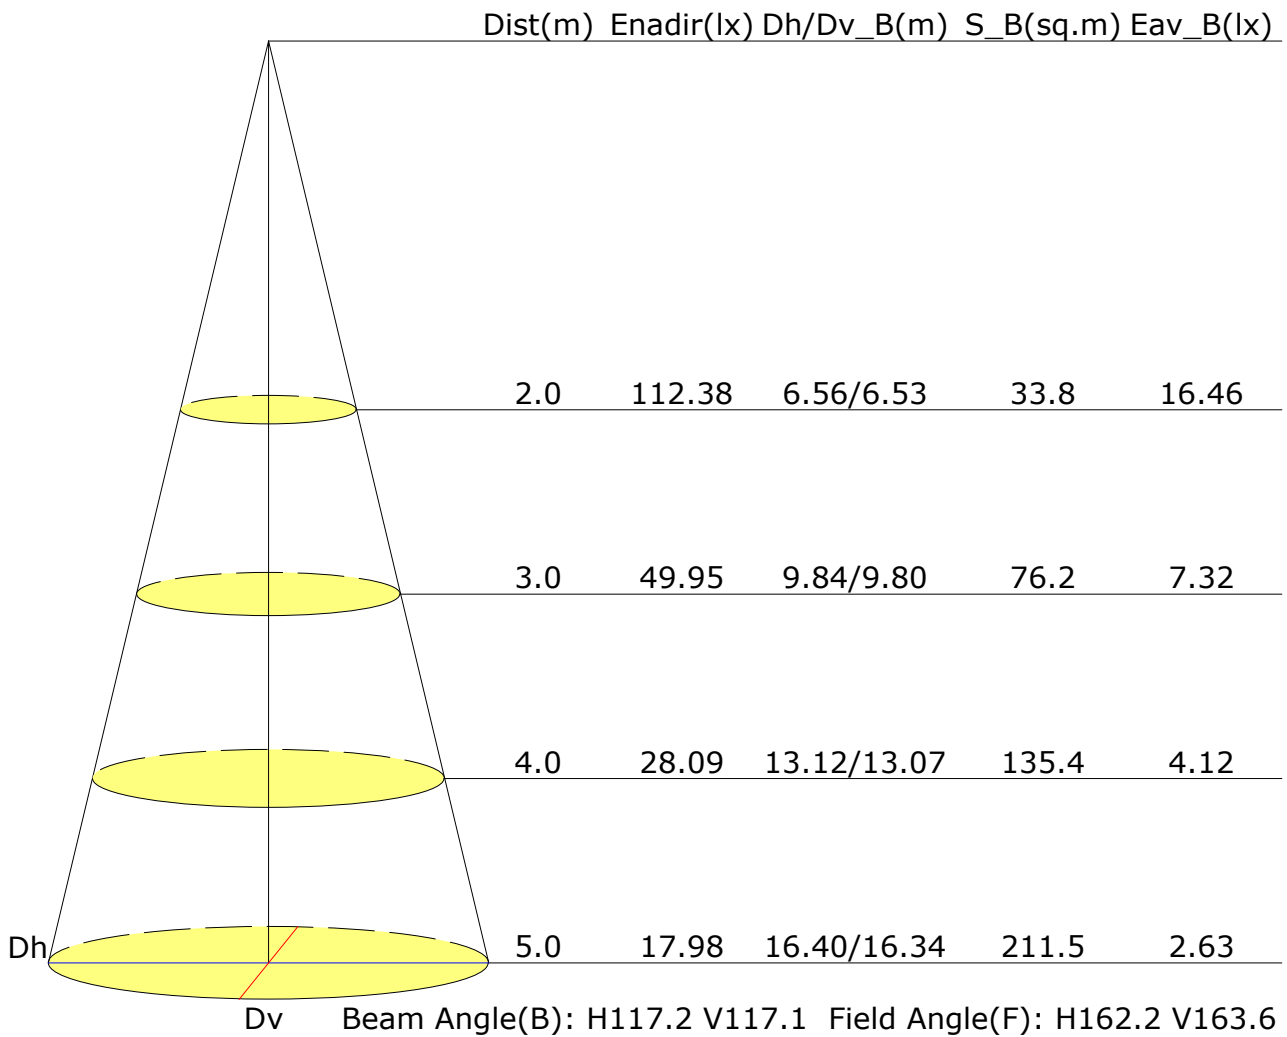

Vertical IsoLux Plot

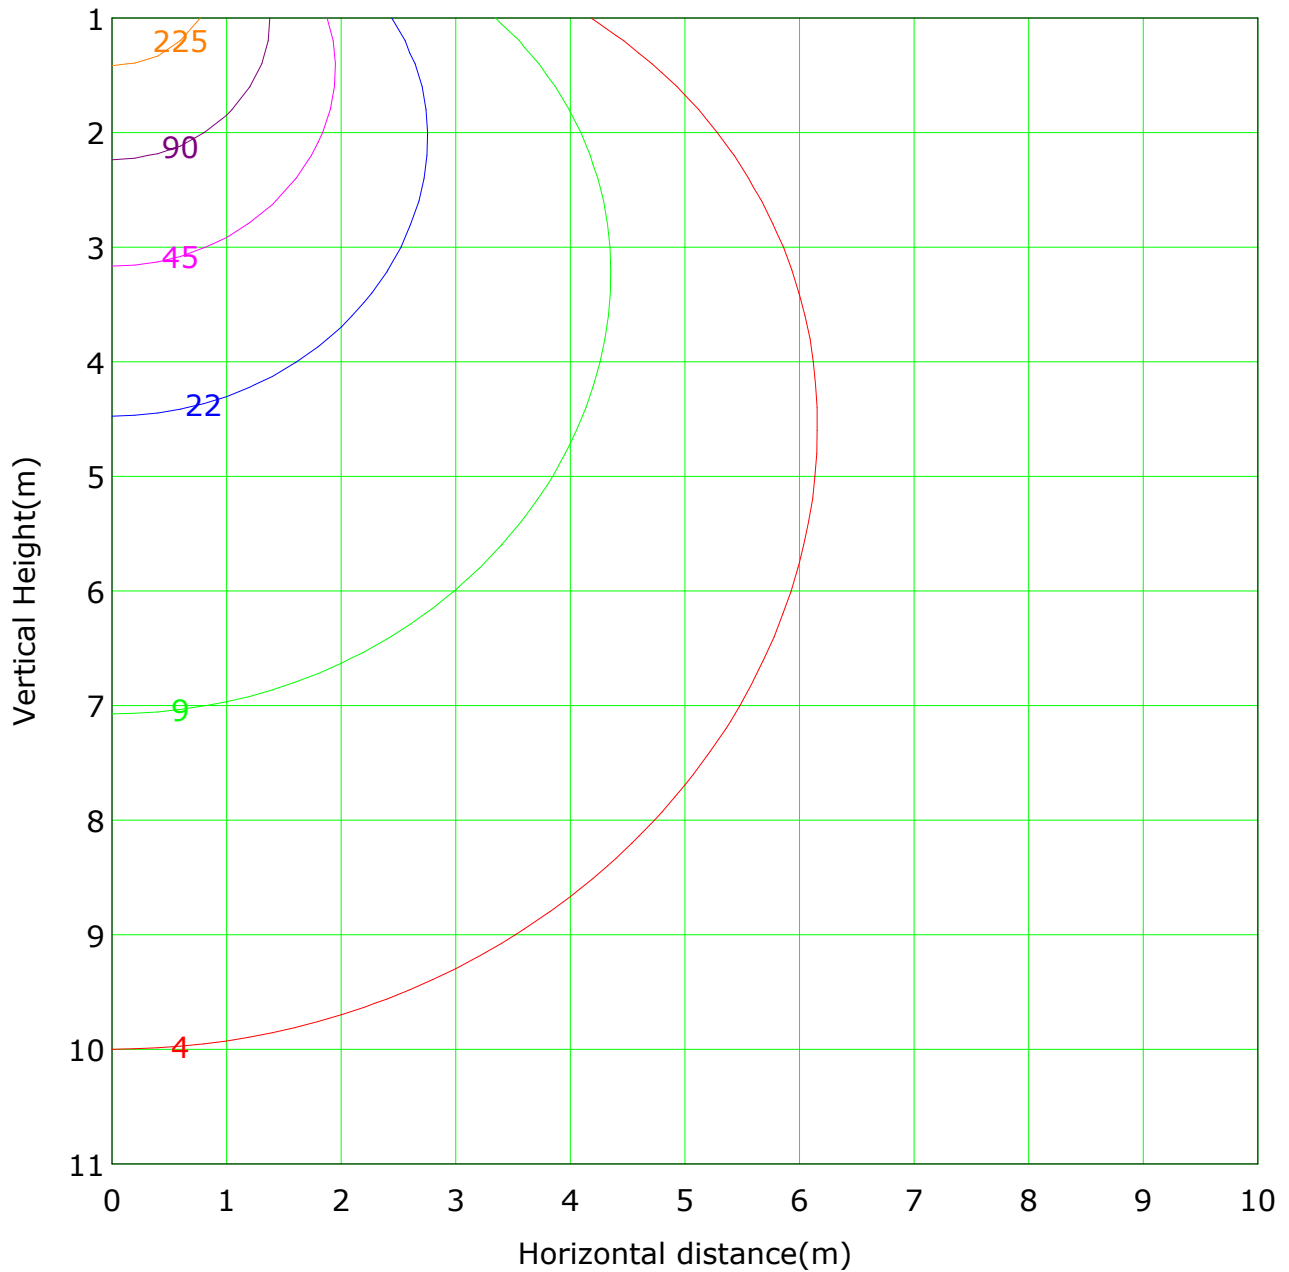

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 449.5 lx
— (1%): 4.5 lx — (2%): 9.0 lx
— (5%): 22.5 lx — (10%): 45.0 lx
— (20%): 89.9 lx — (50%): 224.8 lx
— (100%): 449.5 lx


Area Flux Table

		Unit: lm																				
Vertical plane	-90	0.0	0.0	0.1	0.2	0.4	0.6	0.8	0.9	1.0	1.0	1.0	0.8	0.7	0.5	0.3	0.2	0.1	0.0	8.7	2.6	
	-80	0.0	0.1	0.4	0.8	1.4	1.9	2.5	2.9	3.1	3.2	2.9	2.5	2.0	1.4	0.9	0.4	0.2	0.0	26.7	25.0	
	-70	0.0	0.2	0.7	1.5	2.5	3.5	4.5	5.2	5.6	5.6	5.2	4.5	3.6	2.6	1.6	0.8	0.3	0.0	48.0	47.4	
	-60	0.0	0.3	1.1	2.3	3.7	5.1	6.4	7.3	7.8	7.8	7.3	6.4	5.1	3.7	2.3	1.2	0.4	0.0	68.3	67.9	
	-50	0.0	0.5	1.5	2.9	4.7	6.4	8.0	9.1	9.7	9.7	9.1	8.0	6.5	4.7	3.0	1.5	0.5	0.1	85.9	85.7	
	-40	0.1	0.6	1.8	3.5	5.5	7.5	9.3	10.6	11.3	11.3	10.6	9.3	7.5	5.5	3.5	1.8	0.6	0.1	100.3	100.1	
	-30	0.1	0.6	2.0	3.9	6.1	8.3	10.3	11.7	12.4	12.4	11.7	10.3	8.3	6.2	4.0	2.1	0.7	0.1	111.1	111.0	
	-20	0.1	0.7	2.2	4.2	6.6	8.9	10.9	12.4	13.1	13.1	12.3	10.9	8.9	6.6	4.3	2.2	0.8	0.1	118.2	118.0	
	-10	0.1	0.7	2.2	4.3	6.8	9.1	11.2	12.7	13.5	13.5	12.7	11.2	9.2	6.8	4.4	2.3	0.8	0.1	121.6	121.5	
	0	0.1	0.7	2.2	4.3	6.7	9.1	11.1	12.6	13.4	13.4	12.7	11.2	9.1	6.8	4.4	2.3	0.8	0.1	121.1	121.0	
	10	0.1	0.7	2.1	4.2	6.5	8.8	10.7	12.2	12.9	12.9	12.2	10.8	8.8	6.5	4.2	2.2	0.8	0.1	116.6	116.4	
	20	0.1	0.6	2.0	3.9	6.0	8.2	10.0	11.3	12.0	12.0	11.4	10.0	8.2	6.0	3.9	2.0	0.7	0.1	108.4	108.3	
	30	0.1	0.6	1.7	3.4	5.3	7.3	8.9	10.2	10.8	10.8	10.2	8.9	7.3	5.4	3.5	1.8	0.6	0.1	96.6	96.5	
	40	0.0	0.5	1.4	2.8	4.5	6.1	7.6	8.6	9.2	9.2	8.6	7.6	6.1	4.5	2.9	1.5	0.5	0.1	81.5	81.3	
	50	0.0	0.3	1.1	2.2	3.4	4.7	5.9	6.7	7.2	7.2	6.7	5.9	4.8	3.5	2.2	1.1	0.4	0.0	63.3	63.0	
	60	0.0	0.2	0.7	1.4	2.3	3.2	4.0	4.6	4.9	4.9	4.6	4.0	3.2	2.3	1.5	0.7	0.2	0.0	42.9	42.2	
	70	0.0	0.1	0.4	0.7	1.2	1.6	2.1	2.4	2.6	2.6	2.4	2.1	1.7	1.2	0.8	0.4	0.1	0.0	22.3	19.7	
	80	0.0	0.0	0.1	0.2	0.3	0.5	0.6	0.7	0.7	0.7	0.6	0.6	0.5	0.3	0.2	0.1	0.1	0.0	6.3	0.2	
	90	Flux(T)	0.8	7.7	23.6	46.9	73.9	101.0	124.7	142.1	151.2	151.2	142.2	124.9	101.4	74.6	47.8	24.6	8.4	1.0	1348	
		Flux(E)	0.0	6.4	22.5	45.7	72.7	99.8	123.5	140.9	150.1	150.1	141.0	123.7	100.3	73.5	46.6	23.4	7.2	0.2		1328
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
		Horizontal plane																				

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

C Plane (°): 0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

The Average Illuminance Effective Figure

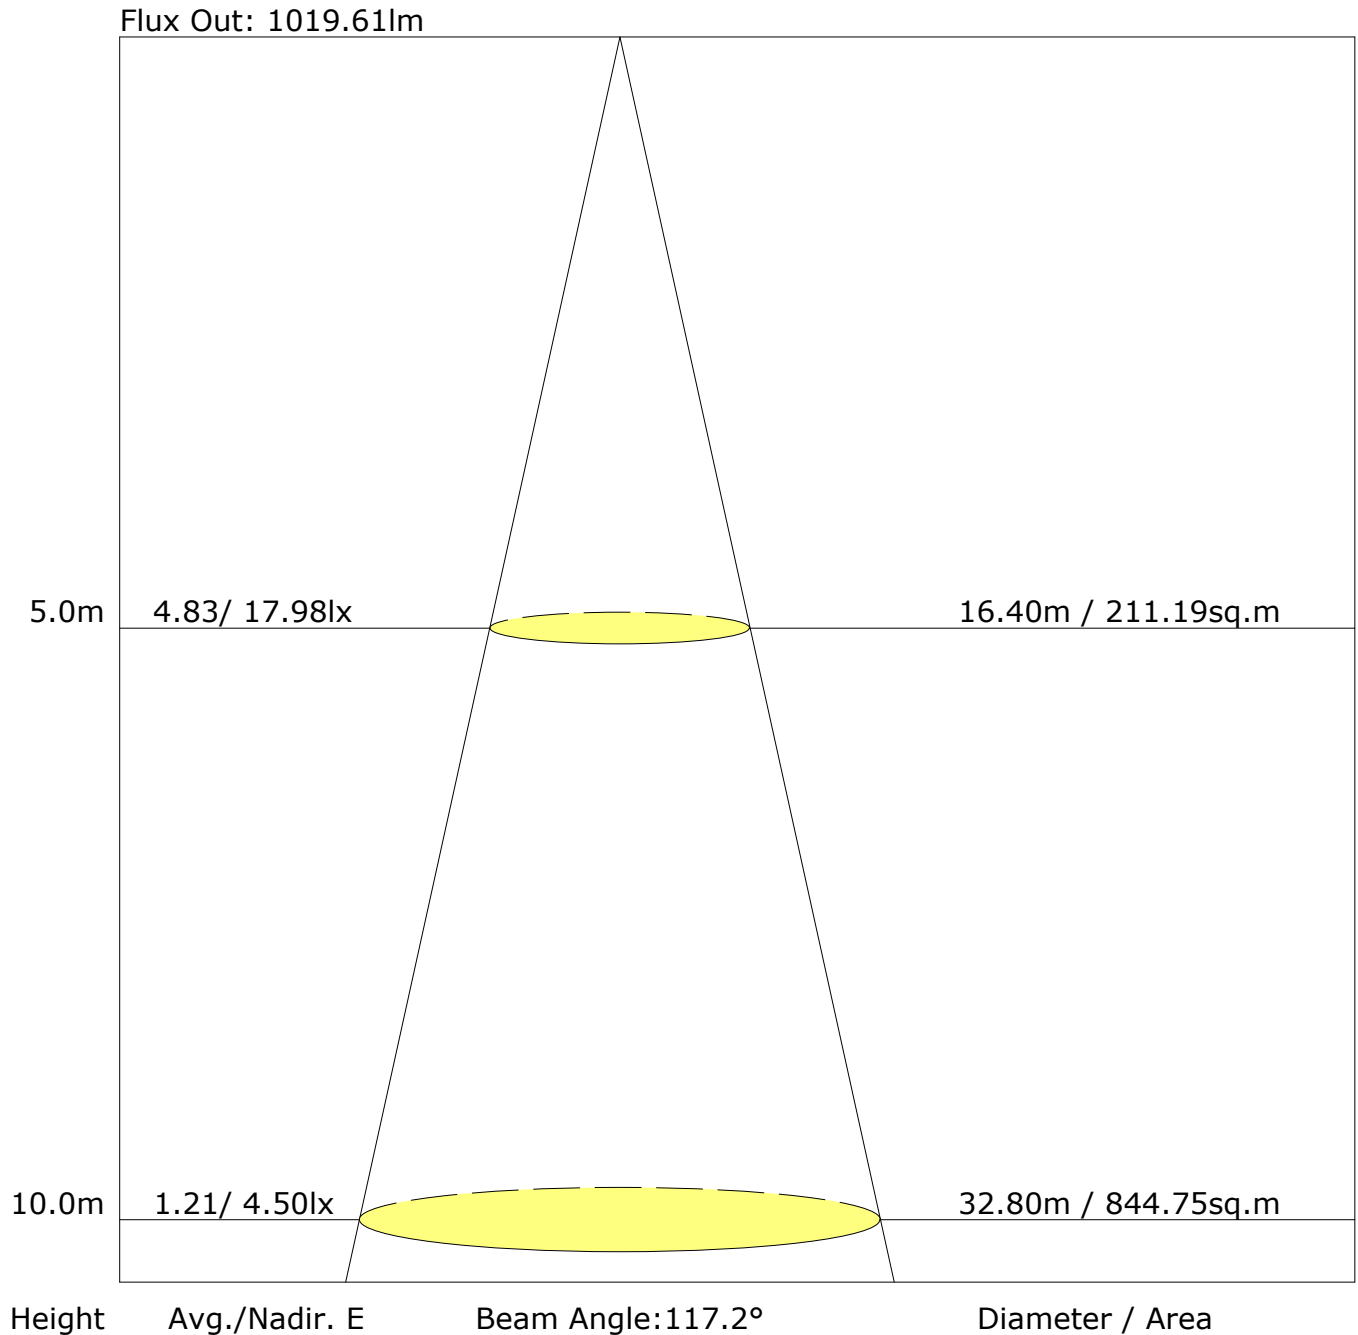


UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	25.5	26.9	25.8	27.1	27.4	25.4	26.8	25.7	27.1	27.3
3H	27.1	28.4	27.5	28.7	29.0	27.0	28.3	27.4	28.6	28.9
4H	27.8	29.0	28.1	29.3	29.6	27.7	28.9	28.0	29.2	29.5
6H	28.2	29.3	28.6	29.7	30.0	28.2	29.3	28.5	29.6	30.0
8H	28.3	29.4	28.7	29.8	30.1	28.3	29.4	28.7	29.7	30.1
12H	28.4	29.5	28.8	29.8	30.2	28.4	29.5	28.8	29.8	30.2
X=4H Y=2H	26.2	27.4	26.5	27.7	28.0	26.1	27.3	26.5	27.6	28.0
3H	28.0	29.0	28.4	29.4	29.7	27.9	29.0	28.3	29.3	29.7
4H	28.7	29.7	29.2	30.1	30.4	28.7	29.6	29.1	30.0	30.4
6H	29.3	30.1	29.8	30.5	31.0	29.3	30.1	29.7	30.5	31.0
8H	29.5	30.3	30.0	30.7	31.1	29.5	30.3	30.0	30.7	31.1
12H	29.6	30.3	30.1	30.8	31.2	29.7	30.4	30.2	30.8	31.3
X=8H Y=4H	29.1	29.8	29.5	30.2	30.7	29.0	29.8	29.5	30.2	30.6
6H	29.8	30.4	30.3	30.8	31.3	29.8	30.4	30.2	30.8	31.3
8H	30.0	30.6	30.5	31.1	31.6	30.1	30.6	30.6	31.1	31.6
12H	30.2	30.7	30.7	31.2	31.7	30.3	30.8	30.8	31.3	31.8
X=12H Y=4H	29.1	29.8	29.5	30.2	30.7	29.0	29.7	29.5	30.2	30.6
6H	29.8	30.4	30.3	30.9	31.4	29.8	30.4	30.3	30.8	31.3
8H	30.2	30.6	30.7	31.1	31.6	30.2	30.7	30.7	31.1	31.7
Variations with the observer position at spacings:										
S=1.0H	+0.2/-0.1					+0.2/-0.1				
S=1.5H	+0.3/-0.4					+0.3/-0.3				
S=2.0H	+0.5/-0.8					+0.5/-0.7				

Calculate in accordance with CIE Pub.117. The table is revised with 1360lm ($8\log(F/F_0) = 1.1$).

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

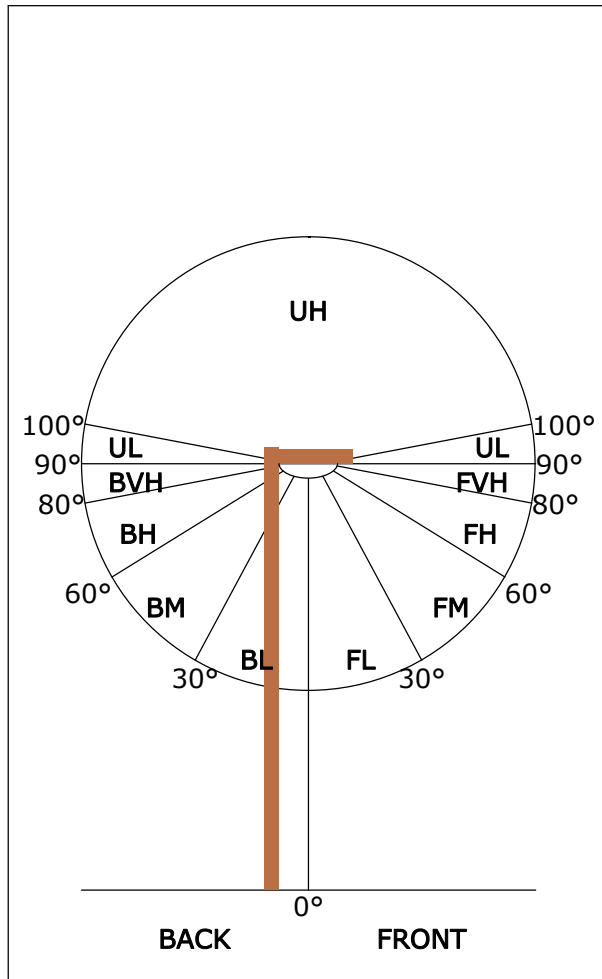


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	659	48.5
FL (0°-30°)	175	12.9
FM (30°-60°)	342	25.1
FH (60°-80°)	130	9.5
FVH (80°-90°)	13	0.9
BACK LIGHT	689	50.7
BL (0°-30°)	177	13.0
BM (30°-60°)	354	26.0
BH (60°-80°)	142	10.4
BVH (80°-90°)	16	1.2
UP LIGHT	12	0.9
UL (90°-100°)	1	0.1
UH (100°-180°)	10	0.8
TRAPPED LIGHT	0	0.0

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U2 G1

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

LCS Graph

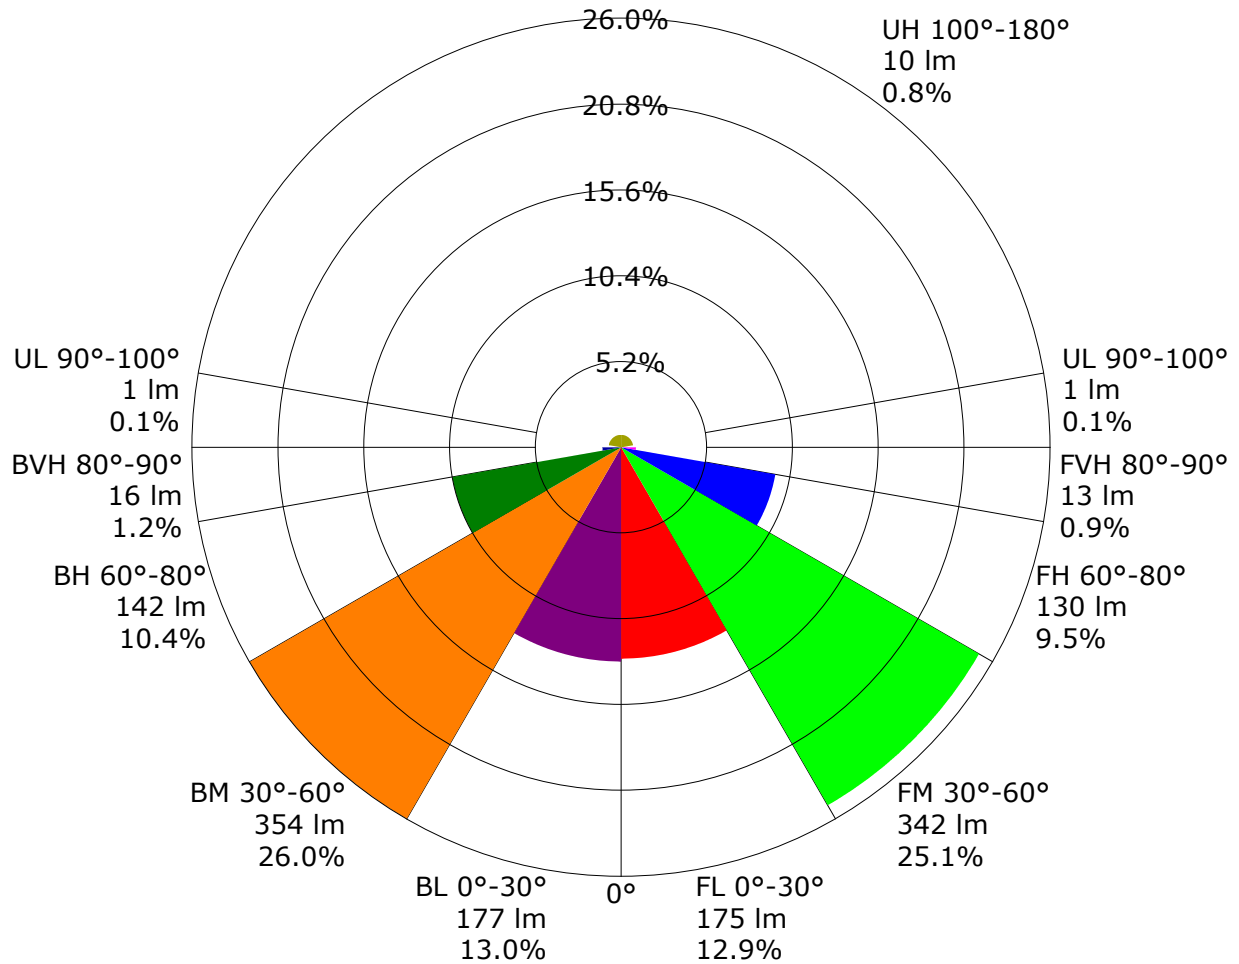

Forward Light

Back Light

Scale= MAX LCS%

Trapped Light:0 lm,0.0%

C Plane (°):0.0-360.0: 22.5

Test Lab: Shining

Test Type: TYPE C

Temperature:

Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.528 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.25									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.55	0.66	0.73	0.79	0.86	0.91	0.95	1.00	1.03	
	0.30		0.47	0.58	0.66	0.71	0.80	0.85	0.90	0.95	0.99	
	0.20		0.41	0.52	0.60	0.66	0.74	0.81	0.85	0.92	0.96	
0.50	0.50	0.20	0.53	0.63	0.71	0.76	0.83	0.88	0.91	0.95	0.98	
	0.30		0.46	0.57	0.64	0.70	0.77	0.83	0.87	0.92	0.95	
	0.20		0.41	0.51	0.59	0.65	0.73	0.79	0.83	0.89	0.92	
0.30	0.50	0.20	0.52	0.61	0.68	0.73	0.80	0.84	0.87	0.92	0.94	
	0.30		0.45	0.55	0.63	0.68	0.75	0.80	0.84	0.89	0.92	
	0.20		0.41	0.51	0.58	0.63	0.71	0.77	0.81	0.86	0.89	
0.00	0.00	0.00	0.38	0.48	0.55	0.60	0.68	0.73	0.76	0.81	0.85	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.25									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	1.02	0.84	0.72	0.63	0.50	0.42	0.36	0.28	0.23	
	0.30		0.85	0.72	0.63	0.55	0.45	0.38	0.33	0.26	0.21	
	0.20		0.73	0.63	0.55	0.50	0.41	0.35	0.31	0.24	0.20	
0.50	0.50	0.20	0.98	0.81	0.69	0.60	0.48	0.43	0.34	0.26	0.21	
	0.30		0.83	0.70	0.61	0.54	0.44	0.37	0.32	0.25	0.21	
	0.20		0.72	0.62	0.54	0.49	0.40	0.34	0.30	0.24	0.20	
0.30	0.50	0.20	0.95	0.78	0.66	0.57	0.46	0.38	0.32	0.25	0.21	
	0.30		0.81	0.68	0.59	0.52	0.42	0.35	0.30	0.24	0.20	
	0.20		0.71	0.61	0.53	0.48	0.39	0.33	0.29	0.23	0.19	
0.00	0.00	0.00	0.61	0.51	0.44	0.39	0.32	0.27	0.23	0.18	0.15	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.25									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.17	0.19	0.19	0.20	0.21	0.21	0.22	0.22	0.23	
	0.30		0.10	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	
	0.20		0.05	0.07	0.08	0.10	0.12	0.13	0.15	0.16	0.18	
0.50	0.50	0.20	0.17	0.18	0.19	0.19	0.20	0.21	0.21	0.21	0.22	
	0.30		0.10	0.12	0.13	0.14	0.15	0.17	0.17	0.19	0.19	
	0.20		0.05	0.07	0.08	0.10	0.12	0.13	0.14	0.16	0.17	
0.30	0.50	0.20	0.16	0.17	0.18	0.19	0.19	0.20	0.20	0.21	0.21	
	0.30		0.10	0.11	0.13	0.14	0.15	0.16	0.17	0.18	0.19	
	0.20		0.05	0.07	0.08	0.09	0.11	0.13	0.14	0.15	0.17	
0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Tel:
Fax:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	447.8	0.4	0.4	0.03	0.03
1.0-2.0	447.7	1.3	1.7	0.09	0.13
2.0-3.0	447.4	2.1	3.9	0.16	0.28
3.0-4.0	447.0	3.0	6.8	0.22	0.50
4.0-5.0	446.5	3.8	10.7	0.28	0.79
5.0-6.0	445.9	4.7	15.4	0.34	1.13
6.0-7.0	445.1	5.5	20.9	0.41	1.54
7.0-8.0	444.2	6.4	27.3	0.47	2.00
8.0-9.0	443.1	7.2	34.4	0.53	2.53
9.0-10.0	442.0	8.0	42.4	0.59	3.12
10.0-11.0	440.7	8.8	51.2	0.65	3.77
11.0-12.0	439.2	9.6	60.9	0.71	4.47
12.0-13.0	437.7	10.4	71.2	0.76	5.24
13.0-14.0	436.0	11.2	82.4	0.82	6.06
14.0-15.0	434.1	11.9	94.3	0.88	6.94
15.0-16.0	432.1	12.7	107.0	0.93	7.87
16.0-17.0	430.0	13.4	120.4	0.98	8.85
17.0-18.0	427.8	14.1	134.5	1.04	9.89
18.0-19.0	425.4	14.8	149.3	1.09	10.98
19.0-20.0	422.9	15.5	164.8	1.14	12.12
20.0-21.0	420.4	16.1	180.9	1.19	13.30
21.0-22.0	417.5	16.8	197.7	1.23	14.54
22.0-23.0	414.6	17.4	215.1	1.28	15.82
23.0-24.0	411.5	18.0	233.1	1.32	17.14
24.0-25.0	408.4	18.6	251.7	1.37	18.51
25.0-26.0	405.2	19.1	270.8	1.41	19.91
26.0-27.0	401.7	19.7	290.4	1.45	21.36
27.0-28.0	398.1	20.2	310.6	1.48	22.84
28.0-29.0	394.5	20.6	331.2	1.52	24.36
29.0-30.0	390.6	21.1	352.3	1.55	25.91
30.0-31.0	386.6	21.5	373.9	1.58	27.49
31.0-32.0	382.5	21.9	395.8	1.61	29.11
32.0-33.0	378.2	22.3	418.1	1.64	30.74
33.0-34.0	374.0	22.6	440.7	1.66	32.41
34.0-35.0	369.5	23.0	463.6	1.69	34.10
35.0-36.0	364.9	23.2	486.9	1.71	35.81

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	360.3	23.5	510.4	1.73	37.53
37.0-38.0	355.4	23.7	534.1	1.74	39.28
38.0-39.0	350.3	23.9	558.0	1.76	41.04
39.0-40.0	345.2	24.1	582.1	1.77	42.81
40.0-41.0	339.9	24.2	606.3	1.78	44.59
41.0-42.0	334.7	24.3	630.6	1.79	46.38
42.0-43.0	329.1	24.4	655.0	1.79	48.17
43.0-44.0	323.3	24.4	679.4	1.79	49.96
44.0-45.0	317.7	24.4	703.8	1.80	51.76
45.0-46.0	311.7	24.4	728.2	1.79	53.55
46.0-47.0	305.8	24.3	752.5	1.79	55.34
47.0-48.0	299.6	24.2	776.8	1.78	57.12
48.0-49.0	293.3	24.1	800.8	1.77	58.89
49.0-50.0	287.1	23.9	824.8	1.76	60.66
50.0-51.0	280.5	23.7	848.5	1.75	62.40
51.0-52.0	273.9	23.5	872.0	1.73	64.13
52.0-53.0	267.1	23.2	895.3	1.71	65.84
53.0-54.0	260.2	22.9	918.2	1.69	67.53
54.0-55.0	253.5	22.6	940.8	1.66	69.19
55.0-56.0	246.4	22.3	963.1	1.64	70.83
56.0-57.0	239.1	21.9	985.0	1.61	72.43
57.0-58.0	232.1	21.5	1006.4	1.58	74.01
58.0-59.0	224.7	21.0	1027.4	1.55	75.56
59.0-60.0	217.2	20.5	1048.0	1.51	77.07
60.0-61.0	209.6	20.0	1068.0	1.47	78.54
61.0-62.0	201.8	19.5	1087.4	1.43	79.97
62.0-63.0	194.3	18.9	1106.3	1.39	81.36
63.0-64.0	186.4	18.3	1124.6	1.35	82.70
64.0-65.0	178.4	17.7	1142.3	1.30	84.00
65.0-66.0	170.7	17.0	1159.3	1.25	85.26
66.0-67.0	162.6	16.3	1175.7	1.20	86.46
67.0-68.0	154.4	15.6	1191.3	1.15	87.61
68.0-69.0	146.2	14.9	1206.2	1.10	88.71
69.0-70.0	138.0	14.2	1220.4	1.04	89.75
70.0-71.0	130.1	13.5	1233.8	0.99	90.74
71.0-72.0	121.8	12.7	1246.5	0.93	91.67

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Page 22 of 34 Pages

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	113.6	11.9	1258.4	0.87	92.54
73.0-74.0	105.7	11.1	1269.5	0.82	93.36
74.0-75.0	97.6	10.3	1279.8	0.76	94.12
75.0-76.0	89.5	9.5	1289.3	0.70	94.82
76.0-77.0	81.6	8.7	1298.0	0.64	95.46
77.0-78.0	73.8	7.9	1305.9	0.58	96.04
78.0-79.0	66.4	7.1	1313.1	0.52	96.56
79.0-80.0	58.9	6.4	1319.4	0.47	97.03
80.0-81.0	51.8	5.6	1325.0	0.41	97.44
81.0-82.0	45.2	4.9	1329.9	0.36	97.80
82.0-83.0	38.7	4.2	1334.1	0.31	98.11
83.0-84.0	32.6	3.6	1337.7	0.26	98.37
84.0-85.0	27.1	3.0	1340.6	0.22	98.59
85.0-86.0	22.0	2.4	1343.0	0.18	98.77
86.0-87.0	17.7	1.9	1345.0	0.14	98.91
87.0-88.0	13.2	1.4	1346.4	0.11	99.02
88.0-89.0	8.7	1.0	1347.4	0.07	99.09
89.0-90.0	4.5	0.5	1347.9	0.04	99.12
90.0-91.0	1.8	0.2	1348.1	0.01	99.14
91.0-92.0	1.1	0.1	1348.2	0.01	99.15
92.0-93.0	1.1	0.1	1348.3	0.01	99.15
93.0-94.0	1.2	0.1	1348.4	0.01	99.16
94.0-95.0	1.2	0.1	1348.6	0.01	99.17
95.0-96.0	1.2	0.1	1348.7	0.01	99.18
96.0-97.0	1.3	0.1	1348.8	0.01	99.19
97.0-98.0	1.3	0.1	1349.0	0.01	99.20
98.0-99.0	1.3	0.1	1349.1	0.01	99.21
99.0-100.0	1.4	0.1	1349.3	0.01	99.23
100.0-101.0	1.4	0.1	1349.4	0.01	99.24
101.0-102.0	1.4	0.2	1349.6	0.01	99.25
102.0-103.0	1.4	0.2	1349.7	0.01	99.26
103.0-104.0	1.5	0.2	1349.9	0.01	99.27
104.0-105.0	1.5	0.2	1350.0	0.01	99.28
105.0-106.0	1.5	0.2	1350.2	0.01	99.29
106.0-107.0	1.5	0.2	1350.4	0.01	99.31
107.0-108.0	1.6	0.2	1350.5	0.01	99.32

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	1.6	0.2	1350.7	0.01	99.33
109.0-110.0	1.6	0.2	1350.9	0.01	99.34
110.0-111.0	1.6	0.2	1351.0	0.01	99.35
111.0-112.0	1.7	0.2	1351.2	0.01	99.37
112.0-113.0	1.7	0.2	1351.4	0.01	99.38
113.0-114.0	1.7	0.2	1351.5	0.01	99.39
114.0-115.0	1.7	0.2	1351.7	0.01	99.41
115.0-116.0	1.8	0.2	1351.9	0.01	99.42
116.0-117.0	1.8	0.2	1352.1	0.01	99.43
117.0-118.0	1.8	0.2	1352.2	0.01	99.44
118.0-119.0	1.8	0.2	1352.4	0.01	99.46
119.0-120.0	1.9	0.2	1352.6	0.01	99.47
120.0-121.0	1.9	0.2	1352.8	0.01	99.48
121.0-122.0	1.9	0.2	1353.0	0.01	99.50
122.0-123.0	1.9	0.2	1353.1	0.01	99.51
123.0-124.0	2.0	0.2	1353.3	0.01	99.52
124.0-125.0	2.0	0.2	1353.5	0.01	99.54
125.0-126.0	2.0	0.2	1353.7	0.01	99.55
126.0-127.0	2.0	0.2	1353.8	0.01	99.56
127.0-128.0	2.1	0.2	1354.0	0.01	99.58
128.0-129.0	2.1	0.2	1354.2	0.01	99.59
129.0-130.0	2.1	0.2	1354.4	0.01	99.60
130.0-131.0	2.1	0.2	1354.6	0.01	99.61
131.0-132.0	2.1	0.2	1354.7	0.01	99.63
132.0-133.0	2.2	0.2	1354.9	0.01	99.64
133.0-134.0	2.2	0.2	1355.1	0.01	99.65
134.0-135.0	2.2	0.2	1355.3	0.01	99.67
135.0-136.0	2.2	0.2	1355.4	0.01	99.68
136.0-137.0	2.2	0.2	1355.6	0.01	99.69
137.0-138.0	2.3	0.2	1355.8	0.01	99.70
138.0-139.0	2.3	0.2	1355.9	0.01	99.72
139.0-140.0	2.3	0.2	1356.1	0.01	99.73
140.0-141.0	2.3	0.2	1356.3	0.01	99.74
141.0-142.0	2.4	0.2	1356.4	0.01	99.75
142.0-143.0	2.4	0.2	1356.6	0.01	99.76
143.0-144.0	2.4	0.2	1356.7	0.01	99.77

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	2.4	0.2	1356.9	0.01	99.79
145.0-146.0	2.4	0.2	1357.0	0.01	99.80
146.0-147.0	2.4	0.1	1357.2	0.01	99.81
147.0-148.0	2.4	0.1	1357.3	0.01	99.82
148.0-149.0	2.5	0.1	1357.5	0.01	99.83
149.0-150.0	2.5	0.1	1357.6	0.01	99.84
150.0-151.0	2.5	0.1	1357.7	0.01	99.85
151.0-152.0	2.5	0.1	1357.9	0.01	99.86
152.0-153.0	2.5	0.1	1358.0	0.01	99.87
153.0-154.0	2.5	0.1	1358.1	0.01	99.88
154.0-155.0	2.5	0.1	1358.2	0.01	99.89
155.0-156.0	2.5	0.1	1358.4	0.01	99.89
156.0-157.0	2.5	0.1	1358.5	0.01	99.90
157.0-158.0	2.5	0.1	1358.6	0.01	99.91
158.0-159.0	2.5	0.1	1358.7	0.01	99.92
159.0-160.0	2.6	0.1	1358.8	0.01	99.92
160.0-161.0	2.6	0.1	1358.9	0.01	99.93
161.0-162.0	2.6	0.1	1359.0	0.01	99.94
162.0-163.0	2.6	0.1	1359.0	0.01	99.94
163.0-164.0	2.6	0.1	1359.1	0.01	99.95
164.0-165.0	2.6	0.1	1359.2	0.01	99.96
165.0-166.0	2.6	0.1	1359.3	0.01	99.96
166.0-167.0	2.6	0.1	1359.3	0.00	99.97
167.0-168.0	2.6	0.1	1359.4	0.00	99.97
168.0-169.0	2.6	0.1	1359.5	0.00	99.97
169.0-170.0	2.6	0.1	1359.5	0.00	99.98
170.0-171.0	2.6	0.0	1359.6	0.00	99.98
171.0-172.0	2.6	0.0	1359.6	0.00	99.99
172.0-173.0	2.6	0.0	1359.6	0.00	99.99
173.0-174.0	2.6	0.0	1359.7	0.00	99.99
174.0-175.0	2.6	0.0	1359.7	0.00	99.99
175.0-176.0	2.6	0.0	1359.7	0.00	99.99
176.0-177.0	2.6	0.0	1359.7	0.00	100.00
177.0-178.0	2.6	0.0	1359.7	0.00	100.00
178.0-179.0	2.6	0.0	1359.8	0.00	100.00
179.0-180.0	2.6	0.0	1359.8	0.00	100.00

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	449.5	448.7	448.0	447.7	446.8	447.2	447.3	447.4	449.5	448.7
G1.0	449.4	448.6	447.8	447.4	446.5	446.9	447.1	447.3	449.4	448.7
G2.0	449.3	448.3	447.5	447.0	446.1	446.5	446.8	447.0	449.2	448.6
G3.0	449.0	447.9	447.0	446.5	445.5	446.0	446.3	446.6	448.9	448.3
G4.0	448.5	447.4	446.4	445.8	444.8	445.3	445.8	446.1	448.4	448.0
G5.0	448.0	446.7	445.7	445.0	444.0	444.6	445.1	445.5	447.9	447.5
G6.0	447.3	445.9	444.7	443.9	442.9	443.6	444.2	444.7	447.1	446.8
G7.0	446.5	445.0	443.8	442.9	441.8	442.5	443.2	443.8	446.3	446.1
G8.0	445.5	443.9	442.5	441.7	440.6	441.3	442.0	442.7	445.3	445.2
G9.0	444.5	442.7	441.3	440.4	439.3	440.0	440.8	441.6	444.1	444.1
G10.0	443.3	441.5	440.0	439.0	437.8	438.6	439.4	440.3	443.0	443.0
G11.0	441.7	440.0	438.4	437.2	436.1	436.9	437.8	438.8	441.5	441.7
G12.0	440.3	438.4	436.8	435.6	434.4	435.3	436.2	437.4	440.0	440.3
G13.0	438.8	436.8	435.0	433.8	432.5	433.4	434.6	435.6	438.4	438.8
G14.0	437.0	434.9	432.9	431.6	430.4	431.3	432.6	433.8	436.5	437.0
G15.0	435.1	432.9	430.9	429.6	428.3	429.3	430.5	431.9	434.7	435.2
G16.0	433.0	430.8	428.5	427.1	425.9	426.9	428.3	429.7	432.5	433.1
G17.0	430.8	428.6	426.4	424.8	423.5	424.7	425.9	427.5	430.5	431.1
G18.0	428.6	426.3	424.0	422.4	421.1	422.2	423.6	425.2	428.1	428.9
G19.0	426.2	423.6	421.3	419.6	418.3	419.3	421.0	422.5	425.6	426.5
G20.0	423.7	421.1	418.6	416.8	415.5	416.7	418.3	420.1	423.1	424.0
G21.0	421.0	418.4	415.9	414.1	412.8	413.9	415.5	417.5	420.5	421.5
G22.0	418.0	415.4	412.7	410.7	409.4	410.6	412.4	414.4	417.4	418.5
G23.0	415.2	412.5	409.7	407.7	406.4	407.7	409.3	411.5	414.6	415.8
G24.0	412.1	409.2	406.2	404.1	402.9	404.1	406.0	408.1	411.2	412.5
G25.0	408.9	406.1	403.0	400.9	399.5	400.7	402.8	405.0	408.1	409.5
G26.0	405.7	402.7	399.5	397.5	396.1	397.4	399.3	401.8	404.8	406.2
G27.0	402.0	398.9	395.8	393.5	392.1	393.5	395.6	398.0	401.1	402.6
G28.0	398.6	395.4	392.1	389.9	388.5	389.8	391.9	394.5	397.5	399.1
G29.0	394.9	391.6	388.5	386.0	384.5	386.0	388.0	390.8	393.9	395.6
G30.0	390.9	387.6	384.3	381.6	380.1	381.6	383.9	386.5	389.8	391.5
G31.0	387.0	383.5	380.2	377.6	376.1	377.7	379.8	382.6	385.9	387.8
G32.0	382.7	379.2	375.5	373.1	371.6	373.0	375.4	378.1	381.4	383.3
G33.0	378.5	374.9	371.4	368.7	367.2	368.8	371.2	374.0	377.1	379.3
G34.0	374.4	370.8	367.1	364.1	362.8	364.3	366.7	369.8	372.9	374.9
G35.0	369.7	365.8	362.1	359.3	357.7	359.4	361.9	364.8	368.1	370.0
G36.0	365.2	361.4	357.4	354.7	353.1	354.6	357.2	360.1	363.5	365.7

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	360.7	356.6	352.8	350.1	348.2	350.0	352.6	355.6	358.7	360.9
G38.0	355.4	351.6	347.4	344.3	343.0	344.5	347.1	350.5	353.5	355.8
G39.0	350.7	346.5	342.5	339.4	337.8	339.6	342.3	345.4	348.5	350.9
G40.0	345.1	341.1	336.9	333.9	332.2	334.1	336.8	340.0	343.0	345.5
G41.0	340.1	336.1	331.7	328.5	326.8	328.7	331.4	334.7	337.7	340.3
G42.0	334.8	330.7	326.5	323.2	321.5	323.4	326.2	329.5	332.4	335.2
G43.0	328.9	324.7	320.5	316.8	315.4	317.0	319.9	323.5	326.3	329.2
G44.0	323.5	319.1	314.8	311.6	309.7	311.5	314.4	317.8	320.9	323.8
G45.0	317.8	313.6	309.0	305.8	304.0	305.7	308.6	312.2	314.8	317.5
G46.0	311.7	307.2	302.8	299.2	297.8	299.5	302.4	305.8	308.9	311.6
G47.0	305.8	301.5	297.0	293.4	291.7	293.4	296.6	300.0	302.8	305.9
G48.0	299.5	295.1	290.3	286.9	284.8	286.9	289.9	293.3	296.1	299.3
G49.0	293.3	288.8	284.0	280.6	278.8	280.8	283.8	287.3	290.0	293.0
G50.0	287.2	282.7	277.8	274.4	272.6	274.3	277.4	280.9	283.6	286.9
G51.0	280.2	275.6	271.0	267.3	265.5	267.4	270.5	273.7	276.7	279.8
G52.0	274.0	269.4	264.5	260.9	259.1	260.8	263.9	267.4	270.0	273.4
G53.0	266.7	262.1	257.4	253.6	251.7	253.7	256.9	260.4	262.6	266.1
G54.0	260.3	255.6	250.6	247.1	245.2	246.9	250.0	253.8	256.0	259.2
G55.0	253.4	248.7	244.0	240.1	238.2	240.2	243.3	246.9	249.0	252.2
G56.0	246.1	241.4	236.3	232.7	230.8	232.5	235.6	239.2	241.2	244.8
G57.0	239.0	234.6	229.5	225.5	223.7	225.3	228.8	232.4	234.0	237.7
G58.0	232.1	227.4	222.3	218.6	216.7	218.4	221.8	225.4	227.0	230.7
G59.0	224.4	219.6	214.6	210.9	208.7	210.7	213.8	217.3	219.2	222.6
G60.0	217.0	212.3	207.2	203.5	201.6	203.6	206.6	210.1	211.6	215.4
G61.0	209.2	204.4	199.4	195.6	193.8	195.4	198.4	201.9	203.6	207.4
G62.0	201.6	196.9	192.1	188.0	186.2	188.1	191.1	194.6	195.9	199.7
G63.0	194.2	189.5	184.4	180.8	178.6	180.5	183.4	186.9	188.0	192.3
G64.0	185.5	180.9	176.3	172.3	170.5	172.4	175.3	178.7	179.8	183.7
G65.0	177.8	173.4	168.5	164.9	163.1	164.5	167.4	170.8	171.8	175.8
G66.0	169.8	165.7	161.0	157.1	155.3	157.0	159.9	163.2	163.8	167.8
G67.0	161.5	157.0	152.3	148.9	147.0	148.4	151.6	154.8	155.3	159.3
G68.0	153.9	149.3	144.7	141.3	139.1	140.8	143.5	146.7	147.4	151.1
G69.0	145.4	140.5	136.3	132.5	131.2	132.5	135.1	138.2	138.4	142.5
G70.0	137.4	132.9	128.3	125.0	123.3	124.6	127.1	130.1	130.6	134.7
G71.0	129.4	124.8	120.6	117.4	115.5	116.9	119.4	122.3	122.3	126.4
G72.0	120.9	116.4	111.8	108.8	107.2	108.3	110.7	113.4	113.3	117.5
G73.0	112.3	108.4	104.2	100.9	99.4	100.9	103.1	105.7	105.4	109.6

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	104.0	100.7	96.3	93.4	92.1	93.5	95.5	97.6	97.2	101.4
G75.0	95.6	92.0	88.2	85.4	83.8	85.1	86.9	89.2	88.8	92.9
G76.0	87.6	84.5	80.8	77.9	76.7	77.6	79.2	81.7	80.7	84.8
G77.0	79.4	76.4	72.6	70.1	69.0	69.8	71.3	73.2	72.4	76.4
G78.0	71.4	69.1	65.5	63.2	62.0	62.9	64.2	65.9	64.9	68.5
G79.0	63.9	61.7	58.4	56.3	55.4	56.0	57.0	58.5	57.2	60.9
G80.0	56.0	54.1	51.1	49.3	48.3	49.0	49.8	51.0	49.3	53.1
G81.0	49.0	47.1	44.5	43.0	42.3	42.6	43.4	44.4	42.1	46.4
G82.0	42.3	40.7	38.5	37.2	36.6	36.8	37.2	37.8	35.6	39.9
G83.0	35.1	33.8	32.4	31.3	30.5	30.9	31.1	31.4	28.7	32.9
G84.0	29.1	28.3	27.1	26.2	25.6	25.7	25.7	25.7	23.0	27.3
G85.0	22.8	22.8	21.9	21.3	20.7	20.8	20.7	20.4	17.5	22.0
G86.0	17.6	18.0	17.5	17.1	16.8	16.9	16.6	16.1	12.8	17.6
G87.0	13.1	14.0	13.8	13.5	13.3	13.4	12.9	12.2	8.9	13.3
G88.0	8.3	10.1	9.2	9.6	10.1	10.2	9.7	8.9	5.2	6.0
G89.0	5.2	3.8	5.4	5.9	6.7	7.5	7.3	6.4	2.4	1.7
G90.0	2.0	1.6	2.3	2.4	3.5	4.3	5.1	4.7	0.9	1.0
G91.0	1.0	1.1	1.1	1.1	1.2	1.2	1.2	1.2	0.9	1.1
G92.0	1.0	1.2	1.1	1.1	1.2	1.2	1.2	1.3	0.9	1.0
G93.0	1.0	1.2	1.1	1.2	1.3	1.3	1.2	1.3	0.9	1.1
G94.0	1.1	1.2	1.2	1.2	1.3	1.3	1.3	1.3	1.0	1.1
G95.0	1.1	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.0	1.1
G96.0	1.2	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.0	1.1
G97.0	1.2	1.4	1.2	1.3	1.3	1.4	1.4	1.4	1.1	1.2
G98.0	1.2	1.4	1.3	1.4	1.3	1.4	1.4	1.4	1.1	1.3
G99.0	1.2	1.4	1.3	1.4	1.4	1.4	1.5	1.4	1.1	1.3
G100.0	1.3	1.4	1.3	1.4	1.4	1.5	1.5	1.5	1.1	1.3
G101.0	1.3	1.5	1.4	1.5	1.4	1.5	1.5	1.5	1.2	1.3
G102.0	1.3	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.2	1.4
G103.0	1.4	1.5	1.4	1.5	1.5	1.6	1.5	1.6	1.3	1.4
G104.0	1.4	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.3	1.4
G105.0	1.4	1.6	1.5	1.6	1.5	1.6	1.6	1.6	1.4	1.4
G106.0	1.4	1.6	1.5	1.6	1.6	1.6	1.6	1.6	1.3	1.5
G107.0	1.5	1.6	1.6	1.6	1.6	1.7	1.6	1.7	1.3	1.5
G108.0	1.5	1.6	1.6	1.6	1.6	1.7	1.6	1.7	1.4	1.5
G109.0	1.5	1.7	1.6	1.6	1.7	1.7	1.7	1.7	1.4	1.5
G110.0	1.5	1.7	1.7	1.7	1.7	1.8	1.8	1.7	1.4	1.6

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	1.6	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.4	1.6
G112.0	1.6	1.8	1.7	1.8	1.8	1.8	1.8	1.8	1.5	1.6
G113.0	1.6	1.8	1.7	1.8	1.8	1.8	1.8	1.8	1.5	1.7
G114.0	1.6	1.8	1.7	1.8	1.9	1.8	1.8	1.9	1.5	1.7
G115.0	1.6	1.8	1.8	1.8	1.9	1.8	1.9	1.9	1.5	1.7
G116.0	1.7	1.8	1.8	1.8	1.9	1.9	1.9	1.9	1.5	1.7
G117.0	1.7	1.9	1.9	1.8	1.9	1.9	1.9	1.9	1.6	1.8
G118.0	1.7	1.9	1.9	1.9	1.9	2.0	1.9	2.0	1.6	1.7
G119.0	1.7	1.9	1.9	1.9	2.0	2.0	1.9	2.0	1.6	1.8
G120.0	1.8	1.9	1.9	1.9	2.0	2.0	2.0	2.0	1.6	1.8
G121.0	1.8	2.0	1.9	1.9	2.0	2.0	2.0	2.0	1.6	1.8
G122.0	1.8	2.0	2.0	2.0	2.0	2.1	2.0	2.0	1.6	1.9
G123.0	1.8	2.0	2.0	2.0	2.0	2.1	2.0	2.1	1.7	1.9
G124.0	1.8	2.0	2.0	2.0	2.0	2.1	2.1	2.1	1.7	1.9
G125.0	1.8	2.0	2.1	2.0	2.1	2.2	2.1	2.1	1.8	2.0
G126.0	1.9	2.0	2.1	2.1	2.1	2.2	2.1	2.1	1.8	2.0
G127.0	1.9	2.1	2.1	2.1	2.2	2.2	2.1	2.1	1.8	2.0
G128.0	1.9	2.1	2.1	2.1	2.2	2.3	2.2	2.2	1.8	2.0
G129.0	1.9	2.1	2.1	2.1	2.2	2.3	2.2	2.2	1.9	2.0
G130.0	2.0	2.2	2.1	2.2	2.2	2.3	2.2	2.2	1.9	2.0
G131.0	2.0	2.2	2.1	2.2	2.2	2.3	2.2	2.2	1.9	2.0
G132.0	2.0	2.2	2.2	2.2	2.3	2.3	2.3	2.2	1.9	2.1
G133.0	2.1	2.2	2.2	2.2	2.3	2.4	2.3	2.3	2.0	2.1
G134.0	2.1	2.2	2.2	2.3	2.3	2.4	2.3	2.3	1.9	2.1
G135.0	2.1	2.2	2.2	2.3	2.4	2.4	2.3	2.3	2.0	2.1
G136.0	2.1	2.3	2.3	2.3	2.4	2.4	2.3	2.3	2.0	2.2
G137.0	2.1	2.3	2.3	2.3	2.4	2.4	2.3	2.3	2.0	2.2
G138.0	2.2	2.3	2.3	2.3	2.4	2.5	2.4	2.3	2.0	2.2
G139.0	2.2	2.3	2.3	2.3	2.4	2.5	2.3	2.4	2.0	2.3
G140.0	2.2	2.3	2.3	2.3	2.4	2.5	2.3	2.4	2.1	2.3
G141.0	2.2	2.3	2.4	2.4	2.4	2.5	2.4	2.4	2.1	2.3
G142.0	2.2	2.4	2.4	2.4	2.4	2.5	2.4	2.4	2.1	2.3
G143.0	2.2	2.4	2.4	2.4	2.5	2.5	2.4	2.4	2.1	2.3
G144.0	2.3	2.4	2.4	2.5	2.5	2.5	2.4	2.5	2.1	2.3
G145.0	2.3	2.4	2.4	2.5	2.5	2.6	2.5	2.5	2.2	2.3
G146.0	2.3	2.4	2.5	2.5	2.5	2.6	2.4	2.5	2.1	2.3
G147.0	2.3	2.4	2.5	2.5	2.5	2.6	2.5	2.5	2.2	2.3

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	2.3	2.4	2.5	2.5	2.5	2.6	2.5	2.5	2.2	2.4
G149.0	2.3	2.5	2.5	2.6	2.6	2.7	2.5	2.5	2.2	2.4
G150.0	2.3	2.5	2.5	2.6	2.6	2.7	2.5	2.5	2.2	2.4
G151.0	2.3	2.5	2.6	2.6	2.6	2.7	2.5	2.5	2.2	2.4
G152.0	2.4	2.5	2.5	2.6	2.6	2.6	2.6	2.5	2.2	2.4
G153.0	2.4	2.5	2.5	2.6	2.6	2.7	2.6	2.6	2.2	2.5
G154.0	2.4	2.5	2.6	2.6	2.6	2.7	2.6	2.6	2.2	2.5
G155.0	2.4	2.5	2.6	2.6	2.6	2.7	2.6	2.6	2.2	2.4
G156.0	2.4	2.5	2.6	2.6	2.6	2.7	2.6	2.6	2.2	2.5
G157.0	2.4	2.5	2.6	2.7	2.6	2.7	2.6	2.6	2.2	2.5
G158.0	2.4	2.5	2.6	2.7	2.6	2.7	2.6	2.6	2.2	2.5
G159.0	2.4	2.6	2.6	2.6	2.7	2.7	2.6	2.6	2.3	2.5
G160.0	2.4	2.6	2.6	2.6	2.7	2.7	2.6	2.6	2.3	2.5
G161.0	2.4	2.6	2.6	2.6	2.6	2.7	2.6	2.6	2.3	2.5
G162.0	2.4	2.5	2.6	2.7	2.6	2.8	2.6	2.6	2.3	2.5
G163.0	2.4	2.5	2.6	2.7	2.7	2.8	2.6	2.6	2.3	2.4
G164.0	2.5	2.5	2.6	2.7	2.7	2.8	2.6	2.6	2.3	2.4
G165.0	2.4	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G166.0	2.5	2.5	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G167.0	2.5	2.6	2.6	2.7	2.6	2.8	2.7	2.6	2.4	2.5
G168.0	2.5	2.6	2.7	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G169.0	2.5	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G170.0	2.5	2.6	2.7	2.7	2.6	2.8	2.7	2.6	2.3	2.5
G171.0	2.5	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G172.0	2.5	2.6	2.6	2.7	2.6	2.8	2.7	2.6	2.3	2.5
G173.0	2.5	2.6	2.7	2.7	2.6	2.8	2.7	2.6	2.3	2.5
G174.0	2.5	2.6	2.6	2.7	2.6	2.8	2.7	2.6	2.3	2.5
G175.0	2.5	2.6	2.6	2.7	2.6	2.8	2.7	2.6	2.3	2.5
G176.0	2.5	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G177.0	2.5	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G178.0	2.5	2.6	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5
G179.0	2.5	2.6	2.7	2.7	2.7	2.8	2.7	2.6	2.4	2.5
G180.0	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.6	2.3	2.5

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 5)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	448.0	447.7	446.8	447.2	447.3	447.4	449.5			
G1.0	448.1	447.9	447.0	447.4	447.4	447.4	449.4			
G2.0	448.1	447.9	447.1	447.4	447.4	447.3	449.3			
G3.0	448.0	447.8	447.0	447.3	447.2	447.0	449.0			
G4.0	447.7	447.5	446.8	447.1	446.9	446.5	448.5			
G5.0	447.3	447.2	446.5	446.7	446.5	446.1	448.0			
G6.0	446.7	446.7	446.0	446.2	445.9	445.4	447.3			
G7.0	446.1	446.1	445.5	445.6	445.3	444.7	446.5			
G8.0	445.3	445.4	444.7	444.7	444.4	443.7	445.5			
G9.0	444.3	444.5	443.8	443.9	443.5	442.7	444.5			
G10.0	443.3	443.5	442.8	442.9	442.4	441.5	443.3			
G11.0	442.0	442.4	441.6	441.7	441.1	440.2	441.7			
G12.0	440.7	441.0	440.4	440.5	439.8	438.9	440.3			
G13.0	439.3	439.7	439.0	439.1	438.4	437.3	438.8			
G14.0	437.6	438.1	437.5	437.5	436.7	435.5	437.0			
G15.0	436.0	436.4	435.8	435.8	435.0	433.7	435.1			
G16.0	433.9	434.5	434.0	433.9	433.0	431.7	433.0			
G17.0	431.9	432.5	432.0	431.9	431.0	429.6	430.8			
G18.0	429.9	430.5	430.1	430.0	428.9	427.5	428.6			
G19.0	427.4	428.2	427.7	427.6	426.5	425.0	426.2			
G20.0	425.1	426.0	425.5	425.4	424.2	422.6	423.7			
G21.0	422.6	423.5	423.2	422.9	421.6	420.0	421.0			
G22.0	419.8	420.7	420.4	420.1	418.9	417.2	418.0			
G23.0	417.0	418.0	417.6	417.5	416.2	414.4	415.2			
G24.0	413.9	415.0	414.7	414.3	413.0	411.1	412.1			
G25.0	411.0	412.0	411.7	411.4	410.1	408.2	408.9			
G26.0	407.8	409.0	408.7	408.3	407.0	404.9	405.7			
G27.0	404.3	405.4	405.1	404.8	403.4	401.4	402.0			
G28.0	400.8	402.1	401.9	401.4	400.1	397.9	398.6			
G29.0	397.2	398.5	398.4	398.0	396.7	394.5	394.9			
G30.0	393.3	394.5	394.6	394.0	392.6	390.4	390.9			
G31.0	389.5	390.9	390.9	390.4	388.8	386.5	387.0			
G32.0	385.3	386.7	386.8	386.1	384.7	382.3	382.7			
G33.0	381.2	382.6	382.7	382.2	380.5	378.1	378.5			
G34.0	377.1	378.6	378.5	378.1	376.5	374.1	374.4			
G35.0	372.3	373.9	374.0	373.4	371.8	369.3	369.7			
G36.0	368.0	369.5	369.8	369.1	367.5	365.0	365.2			

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Page 31 of 34 Pages

Candlepower Table (Continue 6)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	363.3	365.0	365.3	364.5	362.9	360.3	360.7			
G38.0	358.4	360.1	360.1	359.6	358.0	355.3	355.4			
G39.0	353.5	355.3	355.5	354.8	353.1	350.5	350.7			
G40.0	348.2	349.8	350.4	349.6	347.9	344.9	345.1			
G41.0	343.0	344.9	345.3	344.5	342.8	340.0	340.1			
G42.0	337.6	339.6	340.0	339.5	337.8	335.0	334.8			
G43.0	332.0	334.1	334.4	333.7	331.9	329.1	328.9			
G44.0	326.4	328.5	329.0	328.3	326.7	323.6	323.5			
G45.0	320.5	322.6	322.9	322.4	320.6	317.7	317.8			
G46.0	314.7	316.9	317.5	316.7	314.9	311.9	311.7			
G47.0	309.0	311.3	311.7	311.1	309.3	306.3	305.8			
G48.0	302.4	304.6	305.2	304.6	302.8	299.7	299.5			
G49.0	296.2	298.8	299.1	298.6	296.7	293.6	293.3			
G50.0	289.9	292.5	293.2	292.6	290.5	287.4	287.2			
G51.0	283.1	285.7	286.3	285.7	283.8	280.7	280.2			
G52.0	276.9	279.3	280.2	279.6	277.4	274.2	274.0			
G53.0	269.7	272.4	273.0	272.5	270.6	267.3	266.7			
G54.0	262.9	265.6	266.4	265.8	263.9	260.5	260.3			
G55.0	256.2	258.8	259.9	259.4	257.1	254.0	253.4			
G56.0	248.6	251.6	252.8	251.9	249.9	246.5	246.1			
G57.0	241.5	244.6	245.8	244.9	242.9	239.4	239.0			
G58.0	234.6	237.7	238.7	238.1	236.2	232.6	232.1			
G59.0	226.6	229.8	230.8	230.2	228.3	224.7	224.4			
G60.0	219.5	222.7	223.8	223.2	221.2	217.6	217.0			
G61.0	211.3	214.6	216.0	215.5	213.2	209.5	209.2			
G62.0	203.6	207.0	208.6	208.0	205.7	201.9	201.6			
G63.0	196.3	199.4	201.0	200.5	198.4	194.6	194.2			
G64.0	187.8	191.3	193.0	192.4	190.1	186.2	185.5			
G65.0	180.3	183.9	185.3	184.8	182.2	178.7	177.8			
G66.0	172.4	176.1	177.5	176.9	174.8	170.7	169.8			
G67.0	163.6	167.4	169.3	168.7	166.1	162.0	161.5			
G68.0	155.8	159.7	161.3	160.7	158.5	154.3	153.9			
G69.0	147.0	150.9	152.9	152.4	150.2	145.8	145.4			
G70.0	139.2	143.1	144.9	144.4	142.1	137.8	137.4			
G71.0	131.0	135.4	137.2	136.7	134.0	129.6	129.4			
G72.0	122.5	126.5	128.4	127.9	125.5	121.3	120.9			
G73.0	114.3	118.7	120.7	120.2	117.4	113.2	112.3			

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Candlepower Table (Continue 7)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	106.5	110.6	112.7	112.2	109.7	105.2	104.0			
G75.0	97.7	101.9	104.4	103.9	101.0	96.8	95.6			
G76.0	90.0	94.3	96.5	96.0	93.4	89.2	87.6			
G77.0	81.2	85.9	88.2	87.7	84.8	80.9	79.4			
G78.0	73.8	78.2	80.5	80.0	77.4	73.2	71.4			
G79.0	66.1	70.6	73.3	72.8	69.8	65.6	63.9			
G80.0	58.3	62.9	65.3	64.8	62.0	57.8	56.0			
G81.0	51.5	55.7	58.5	58.0	55.2	51.0	49.0			
G82.0	44.7	49.2	52.0	51.2	48.3	44.1	42.3			
G83.0	38.0	42.6	44.9	44.4	41.3	37.2	35.1			
G84.0	32.3	36.8	39.0	38.3	35.5	31.0	29.1			
G85.0	26.7	30.9	33.2	32.6	29.6	25.1	22.8			
G86.0	22.1	26.1	28.3	27.6	24.7	20.1	17.6			
G87.0	17.1	20.2	23.8	23.5	20.4	16.0	13.1			
G88.0	10.5	13.6	16.3	18.5	16.1	11.8	8.3			
G89.0	4.3	6.4	11.1	10.8	11.5	8.3	5.2			
G90.0	1.1	1.9	3.6	1.1	1.1	2.1	2.0			
G91.0	1.1	1.1	1.0	1.1	1.1	1.2	1.0			
G92.0	1.1	1.2	1.0	1.1	1.1	1.2	1.0			
G93.0	1.1	1.2	1.1	1.1	1.2	1.3	1.0			
G94.0	1.1	1.2	1.1	1.2	1.2	1.3	1.1			
G95.0	1.2	1.2	1.1	1.2	1.2	1.3	1.1			
G96.0	1.2	1.3	1.1	1.2	1.3	1.4	1.2			
G97.0	1.3	1.3	1.1	1.2	1.3	1.4	1.2			
G98.0	1.3	1.3	1.2	1.3	1.3	1.4	1.2			
G99.0	1.3	1.3	1.2	1.3	1.4	1.4	1.2			
G100.0	1.3	1.4	1.2	1.4	1.4	1.5	1.3			
G101.0	1.4	1.3	1.3	1.4	1.4	1.5	1.3			
G102.0	1.4	1.3	1.3	1.4	1.5	1.5	1.3			
G103.0	1.4	1.4	1.3	1.4	1.5	1.5	1.4			
G104.0	1.4	1.4	1.4	1.4	1.5	1.6	1.4			
G105.0	1.5	1.4	1.4	1.5	1.5	1.6	1.4			
G106.0	1.5	1.4	1.4	1.5	1.6	1.6	1.4			
G107.0	1.5	1.5	1.5	1.5	1.6	1.7	1.5			
G108.0	1.5	1.5	1.5	1.6	1.6	1.7	1.5			
G109.0	1.6	1.5	1.5	1.6	1.7	1.7	1.5			
G110.0	1.6	1.5	1.5	1.6	1.7	1.7	1.5			

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Page 33 of 34 Pages

Candlepower Table (Continue 8)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	1.6	1.6	1.5	1.6	1.7	1.7	1.6			
G112.0	1.6	1.6	1.6	1.7	1.7	1.8	1.6			
G113.0	1.7	1.6	1.6	1.7	1.8	1.8	1.6			
G114.0	1.7	1.6	1.6	1.7	1.8	1.8	1.6			
G115.0	1.7	1.7	1.7	1.8	1.8	1.8	1.6			
G116.0	1.7	1.7	1.7	1.8	1.8	1.9	1.7			
G117.0	1.7	1.7	1.7	1.8	1.8	1.9	1.7			
G118.0	1.8	1.8	1.7	1.9	1.9	1.9	1.7			
G119.0	1.8	1.8	1.7	1.9	1.9	1.9	1.7			
G120.0	1.8	1.8	1.8	1.9	1.9	2.0	1.8			
G121.0	1.9	1.9	1.8	1.9	2.0	2.0	1.8			
G122.0	1.9	1.9	1.8	1.9	2.0	2.0	1.8			
G123.0	1.9	1.9	1.9	2.0	2.0	2.0	1.8			
G124.0	2.0	1.9	1.9	1.9	2.0	2.0	1.8			
G125.0	2.0	1.9	2.0	1.9	2.0	2.0	1.8			
G126.0	2.0	2.0	2.0	2.0	2.0	2.1	1.9			
G127.0	2.0	2.0	2.0	2.0	2.1	2.1	1.9			
G128.0	2.0	2.0	2.0	2.0	2.1	2.1	1.9			
G129.0	2.0	2.0	2.0	2.0	2.1	2.1	1.9			
G130.0	2.1	2.0	2.1	2.0	2.2	2.2	2.0			
G131.0	2.1	2.1	2.1	2.0	2.2	2.2	2.0			
G132.0	2.1	2.1	2.1	2.1	2.2	2.2	2.0			
G133.0	2.1	2.1	2.1	2.1	2.2	2.2	2.1			
G134.0	2.2	2.1	2.2	2.1	2.2	2.2	2.1			
G135.0	2.2	2.2	2.2	2.1	2.3	2.3	2.1			
G136.0	2.2	2.2	2.2	2.2	2.3	2.3	2.1			
G137.0	2.2	2.2	2.2	2.2	2.3	2.3	2.1			
G138.0	2.3	2.2	2.2	2.2	2.4	2.4	2.2			
G139.0	2.3	2.2	2.2	2.3	2.4	2.4	2.2			
G140.0	2.3	2.2	2.3	2.3	2.3	2.4	2.2			
G141.0	2.3	2.3	2.3	2.4	2.3	2.5	2.2			
G142.0	2.3	2.3	2.3	2.4	2.4	2.5	2.2			
G143.0	2.3	2.3	2.3	2.4	2.4	2.5	2.2			
G144.0	2.3	2.3	2.3	2.4	2.4	2.5	2.3			
G145.0	2.3	2.3	2.4	2.4	2.5	2.5	2.3			
G146.0	2.4	2.3	2.4	2.5	2.5	2.5	2.3			
G147.0	2.4	2.4	2.4	2.5	2.5	2.6	2.3			

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector:

Tel:
Fax:

Page 34 of 34 Pages

Candlepower Table (Continue 9)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	2.4	2.4	2.4	2.5	2.5	2.6	2.3			
G149.0	2.4	2.4	2.4	2.5	2.5	2.6	2.3			
G150.0	2.4	2.4	2.5	2.5	2.6	2.6	2.3			
G151.0	2.5	2.4	2.5	2.5	2.6	2.6	2.3			
G152.0	2.4	2.5	2.5	2.5	2.5	2.5	2.4			
G153.0	2.5	2.4	2.5	2.5	2.5	2.5	2.4			
G154.0	2.5	2.5	2.5	2.6	2.5	2.5	2.4			
G155.0	2.5	2.4	2.5	2.6	2.6	2.5	2.4			
G156.0	2.5	2.5	2.5	2.6	2.6	2.5	2.4			
G157.0	2.5	2.5	2.5	2.6	2.6	2.5	2.4			
G158.0	2.5	2.5	2.6	2.6	2.6	2.5	2.4			
G159.0	2.5	2.5	2.5	2.7	2.6	2.6	2.4			
G160.0	2.5	2.5	2.5	2.6	2.6	2.6	2.4			
G161.0	2.5	2.5	2.6	2.7	2.6	2.6	2.4			
G162.0	2.5	2.6	2.6	2.6	2.6	2.6	2.4			
G163.0	2.5	2.6	2.6	2.6	2.6	2.6	2.4			
G164.0	2.5	2.6	2.6	2.6	2.6	2.6	2.5			
G165.0	2.5	2.6	2.6	2.6	2.6	2.6	2.4			
G166.0	2.6	2.6	2.7	2.6	2.6	2.6	2.5			
G167.0	2.6	2.6	2.6	2.6	2.6	2.6	2.5			
G168.0	2.6	2.6	2.6	2.6	2.6	2.6	2.5			
G169.0	2.6	2.6	2.6	2.7	2.6	2.7	2.5			
G170.0	2.6	2.6	2.6	2.6	2.7	2.6	2.5			
G171.0	2.6	2.7	2.6	2.7	2.6	2.6	2.5			
G172.0	2.6	2.7	2.6	2.7	2.7	2.6	2.5			
G173.0	2.6	2.6	2.6	2.6	2.7	2.7	2.5			
G174.0	2.6	2.6	2.6	2.7	2.7	2.6	2.5			
G175.0	2.6	2.7	2.7	2.7	2.7	2.6	2.5			
G176.0	2.6	2.7	2.6	2.7	2.7	2.7	2.5			
G177.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5			
G178.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5			
G179.0	2.7	2.7	2.7	2.7	2.7	2.7	2.5			
G180.0	2.7	2.7	2.7	2.6	2.6	2.7	2.6			

C Plane (°):0.0-360.0: 22.5
Test Lab: Shining
Test Type: TYPE C
Temperature:
Operator: MIGUEL

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.528 m
Humidity:
Inspector: